

PRODUCT
CATALOG

NITECORE®
KEEP INNOVATING

NITECORE®



SYSMAX CORP.

www.nitecore.com

SYSMAX Innovations Co., Ltd.

24/F, TCL Plaza, No. 18 Haizhou Road, Haizhu District, Guangzhou,

510335, Guangdong, China

Tel: +86 20 83882000 Fax: +86 20 83882723

E-mail: info@nitecore.com

NITECORE®

CONTENTS

2 About NITECORE

- 4 Awards
- 6 Brand Image
- 8 Global Users
- 10 Knowledge
- 15 Patents
- 16 Quality Assurance
- 18 Scenarios

20 Headlamp

- 22 NU Series
- 31 UT Series
- 35 Headlamp Series

40 Flashlight

- 42 EDC Series
- 48 Tiny Monster Series
- 50 Precise Series
- 54 Explorer Series
- 56 Multitask Hybrid Series
- 59 Smart Ring Tactical Series
- 59 Chameleon Series
- 60 Multi-Task Series
- 63 NPL Series
- 66 T Series
- 70 Lantern Series
- 72 NWL Series

- 74 CL Series
- 75 GEM Series
- 75 DL Series

76 Power Solution

- 78 Power Bank
- 82 Battery
- 84 Charger

88 Mosquito Protection

- 88 EMR Series

92 Fan

- 92 NEF Series
- 94 izzCool® Series
- 96 CW Series

98 Explore More

- 98 Air Pump
- 98 Gadget
- 100 Lighting Accessories
- 102 Photography Accessories
- 112 Carry Gear

116 Specifications



www.nitecore.com

1228APCT25EN

KEEP INNOVATING

NITECORE®

2026

Discover the Next Chapter



ABOUT NITECORE

Inspired by the notion to "Keep Innovating" with the industry-leading innovative power for 19 years, NITECORE is the first brand to achieve a grand slam milestone in the industries of professional lighting and chargers to receive the German iF Design Award, Red Dot Design Award, the Japanese G-Mark (Good Design) and the American IDEA, as well as Gold Winners of the ISPO Award and Outstanding Outdoor globally recognized in the outdoor industry. We specialize in product lines varying from professional lighting to outdoor electronics, camera cleaning solutions, and carry gear specially designed for law enforcement and military departments, industrial corporations and outdoor enthusiasts worldwide.

Establishment

2007

Countries and Regions

130+

Global Patents and Certifications

5000+

Clients and Users

10M+

PRODUCT AWARDS

Established in 2007, NITECORE has long been at the forefront of technological advancement in portable illumination. Through its tremendous research and development capacity, NITECORE has become the first brand in the professional lighting and illumination industry to receive all four grand international design prizes including the American IDEA, the German iF Design Award, Red Dot Design Award and the Japanese G-Mark (Good Design), in addition to the worldly famous ISPO Award in the outdoor industry. NITECORE products are internationally recognized in over 130 countries.

 <p>EDC29 Ultra Slim High Performance EDC Flashlight reddot winner 2025</p>	 <p>CineWind® CW20 Multipurpose Pocket Photography Fan GOOD DESIGN AWARD 2024 reddot winner 2025</p>
 <p>EMR10 Portable Electronic Multipurpose Repeller</p>	 <p>CineWind® CW30 Portable Cord-Free Photography Fan reddot winner 2024</p>
 <p>TM20K Ultra High Performance Tactical Searchlight reddot winner 2022</p>	 <p>SUMMIT 10000 Low Temperature Resistant Carbon Fiber Power Bank GOOD DESIGN AWARD 2023</p>
 <p>TINI2 Dual-Core Intelligent Keychain Light kapok</p>	 <p>Camera Sensor Cleaning Solution reddot winner 2022</p>
 <p>NPS600 Portable Outdoor Power Station kapok iF DESIGN AWARD 2021</p>	 <p>BlowerBaby™ Electronic Air Blower Solution reddot winner 2022</p>
 <p>TIKI / TIKI LE Mini Futuristic Keychain Lights kapok iF DESIGN AWARD 2021</p>	 <p>SCL10 2-in-1 Smart Camera Light & Power Bank TIPA World Awards 2021 Best Power Accessory</p>
 <p>21700 Intelligent Battery System</p>	 <p>HU60 & NP81 E-focus Elite Headlamp Set ISPO Award 2021 Winner</p>

MEDIA RECOGNITION

 <p>GEARJUNKIE EDC29 Top Flashlights of SHOT Show 2025</p>	 <p>HICONSUMPTION CARBO 10000 Gen2 The 10 Best New EDC Essentials</p>
 <p>GEARJUNKIE EDC27 The Best Flashlights of 2025</p>	 <p>LUMEN UT27 The Best Headlamp of 2025</p>
 <p>CLEVERHIKER NU27 Best Headlamps of 2025</p>	 <p>GEARJUNKIE NU20 Classic Top Headlamps of SHOT Show 2025</p>
 <p>CLEVERHIKER NU25 UL Best Headlamps of 2025</p>	 <p>GEARJUNKIE EDC33 The Best Flashlights of 2024</p>
 <p>GEARJUNKIE P20iX The Best Flashlights of 2022 (Most Versatile Flashlight)</p>	 <p>EVERYDAY CARRY EDC27 Best Tactical Flashlights for 2024</p>
 <p>EVERYDAY CARRY P10i The 10 Best Tactical Flashlights in 2021</p>	 <p>EVERYDAY CARRY TINI2 Ti 2023 Best Keychain Flashlight</p>
 <p>Backpacker NB10000 The Best Ultralight Powerbank of 2021 The Best Backpacking Electronics of 2021</p>	 <p>Carryology NTP31 Best Tactical Pens to EDC in 2021</p>

GLOBAL PRESENCE

NITECORE has played an essential role in various organizations around the globe and has made great contributions to the outdoor, tactical and photography industry. By now we are the active members of the following organizations:



The Portable Lights American Trade Organization (PLATO)



National Shooting Sports Foundation (NSSF)



High and New Technology Enterprise (HNTE)



China Sporting Goods Federation (CSGF)

NITECORE ATHLETES

Jiasheng Shen

2023 2nd UTMB CCC
2023 4th Western States
100-Mile Endurance Run
2025 1st Mt. FUJII 100



Joaquin Lopez

2024 3rd UTMB
2025 1st Mt. FUJII 100



Germain Grangier

2023 3rd UTMB
2025 3rd Hardrock 100



Katie Schide

2024 1st UTMB
2024 1st Western States
100-Mile Endurance Run
2025 1st Hardrock 100
2025 1st WMTRC



Ha Thi Hau

2023/2024 4th UTMB CCC
2025 1st TSAIGU TRAIL
2025 6th Western States
100-Mile Endurance Run



RongRong Chen

2023 2nd ULTRA-TRAIL
Mt. FUJII
2025 1st Chengdu Trail



Fuzhao Xiong

2023 4th UTMB
2024/2025 2nd Western States
100-Mile Endurance Run
2025 1st Mt. FUJII 100



Josh Wade

2025 3rd UTMB
2025 3rd Transgrancanaria



Tom Evans

2023 1st Western States
100-Mile Endurance Run
2025 1st UTMB



Sunmaya Budha

2025 2nd WMTRC
2025 1st HK100




Scotty Hawker

2021 2nd UTMB CCC

SPONSORED EVENTS



Transgrancanaria



NITECORE + Headlamp Training Research
Brightest TIPS to Low Light Tactics
Low-Light Hard Task Training



Ultra-Trail Village



TPSB 2025 (Trail du Petit Saint Bernard)



Official Exclusive Lighting and
Power Bank Sponsor of Hardrock 100



Official Exclusive Lighting and
Power Bank Sponsor of Rinjani 100



Olympus Marathon




Mt. FUJII 100



Chiangmai Thailand by UTMB



Sole Lighting Sponsor of
HK100 Ultra Trail



Borneo TMBT
Ultra Trail Marathon



Vietnam Mountain Marathon



TSAIGU TRAIL AGENDA



CHALAM NOI IDPA CHALLENGE



POMERANIA TRAIL



Guangzhou Dream Cycling Team



@测评界的野路子



@户外小祝



@NickShabazz



@Run4Adventure



@Backcountry Kiwi



@Mat min



@萤火部落



@Mirco Tere & Bella




@Frugal Outdoors & Camping



@Miguel Quiles




@Out With A Finn




@survivaland

★★★★★ GLOBAL USERS

NITECORE has gained global popularity and is beloved by users around the world. Our products are regularly featured on major social media platforms and highly recommended by users from various regions.



@french.tactical_5.0




@bossfirearms6384




@tactical_advisor



@Daniel Kordan



@UFO TEAM



@mental_crisis26




@MILLholic



@Charles BridgTec



@LumenLaboratory



@Nakashi Army



@Jiggie Alejandrino



@Josh Fenn



@Kumander Daot



@Andrea Carretta




@Jon Gadget



@Outer Limitless Lights



@Moorlander EDC



@Proyecto Sandia



@Marusya Outdoors



@Huy BT 5.0




@TAG 塔格防务



@IDPA CHINA



@盖隐技术 GainTachnic



@Honzashooter



@miliholic

KNOWLEDGE

NiteLab®

Industry's First Professional Portable Lighting LED Brand

Both NiteLab and NITECORE belong to SYSMAX which is dedicated to exploring LED technology to reinvent the portable lighting LED solutions.




UHE LED

Ultra High Efficiency

UHE, short for Ultra High Efficiency, represents NiteLab's pioneering development in LEDs and is specifically designed for high performance gear such as headlamps. It delivers enhanced efficiency per watt, offering a brighter, more energy-efficient, and long-lasting lighting experience.

Max Luminous Efficiency Comparison

UHE LED	21% ↑	190 lm/W
SST 40 LED		157 lm/W



UHi LED

Ultra High Intensity

New Generation Tailor-Made Portable Lighting LED

LED New Benchmark

NiteLab cooperated with an industrial partner to jointly develop the UHi LED Series, specially designed for portable lighting. Featuring high light density and ultra high beam intensity, the UHi LED utilizes the round light emitting surface (LES) to achieve an optimal lighting effect and beam distance, which challenges the impossible and begins a new era.

UHi 10 UHi 20/MAX UHi 25 UHi 40/MAX UHi 50 UHi 100

From Square to Round

UHi LED + Round Reflector



Conventional Square LED + Round Reflector

Ultra Mini Design Ultra High Light Density

Light Density Comparison


(Max brightness per square millimeter of the light emitting surface)

UHi 20

876 Lumens/mm²



VS



Same Power LED

611 Lumens/mm²



M515S LED

Multi-core X-shaped Array

Self-developed by NiteLab, the M515S LED, a next-generation professional mobile lighting solution, features a groundbreaking X-shaped array packaging architecture, integrating a high luminous density core with four high efficiency cores in a diagonally symmetric design.

NITECORE Model: EX7



Central
High Luminous Density & Long Throw Core
Ultra High Beam Intensity & Ultra Long Throw



Peripheral
High Efficiency Flood Core
Beam Pattern Switch & Powerful Light Output

Variable Beam Pattern

Spotlight

Search
Rescue



Floodlight

Pathway Lighting
Area Lighting



Mixed Light

General Use





MCT LIGHTING SYSTEM

(Variable CRI Multiple Color Temperatures)

The MCT (Variable CRI Multiple Color Temperatures) Lighting System combines NiteLab's self-developed MCT UHE LEDs with NITECORE's multi-faceted optical lens system, effectively integrating light sources of different color temperatures and CRI levels into a single, fully blended beam, delivering high CRI, multiple color temperatures, high efficiency, soft lighting, and long-range performance.

MCT UHE LEDs



High-CRI LED
CRI ≥ 90



Conventional LED
CRI 70

Three Color Temperatures & Three CRI Options

CRI ≥ 97

3000K Warm Light

Effectively gathers visual details in high-risk outdoor environments



CRI ≥ 83

4500K Neutral White Light

Better judgment on technical terrain in medium-risk outdoor environments



CRI ≥ 73

6500K Cool White Light

Optimal brightness and efficiency for low-risk outdoor environments



See Clearly, Stay Safe

	Conventional Headlamp	MCT: Variable CRI Multiple Color Temperatures Headlamp
Rain / Fog / Snowfall (Low-Visibility Environments)	Limited Visibility Blurry Details ❌	High Visibility True-to-Life Details ✅
Steep Slopes / Dense Forests (Moderate Technical Terrain)	Terrain Misjudgment ❌	Enhanced Terrain Awareness Clear Path Visibility ✅
Snow / Glare Ice (Highly Reflective Path Surfaces)	Visual Discomfort ❌	Gentle, Comfortable, and Glare-Free ✅

NITECORE Models:



UT27



HA27 UHE



UT2000

PATENTS

Ultraviolet

The UV light has shorter wavelengths than visible light, and is also known as black light. Ultraviolet LED flashlights are useful in many applications, including identifying forged documents, tracing marked bills, leakage/grease inspection, sanitary check, hunting scorpions etc.

NITECORE Models: TIKI, TIKI UV, THUMB LEO, EDC17

Rapid Lock™ Lockout Switch

Full Lock / Half Lock / Unlock With One Slide

NITECORE Models: EDC23, EDC29, EDC31, EDC35, EDC37



LUMIN SHIELD®

LUMIN SHIELD®, specially designed by NITECORE, enables an instant defense with a blazing output thanks to a multi-core UHI MAX LED. This technology is engineered to provide an unprecedented wide-area protective coverage, resembling a shield.

NITECORE Models: EDC29, EDC31, EDC35, EDC37, EX7



Infrared

The IR light is with wavelengths longer than those of visible light. Extensive uses for military and civilian applications include target acquisition, surveillance, night vision, homing, and tracking.

NITECORE Models: C17, NU06 MI

Advanced Randomly Changing STROBE Mode

The randomly changing frequencies available in the STROBE Mode of the latest NITECORE models can cause stronger dizzying effects due to the inadaptability of the naked eyes.

NITECORE Models: P10i, P20i UV, P10iX, P20iX, C17

TurboReady™

NITECORE aims to lead a trend of new tactics with the TurboReady™ technology to enable an instant dazzle strike with a blazing tactical output, in order to produce an abrupt disturbance to your adversary during the day or at night.

NITECORE Models: TM20K, TM12K

TURBO/READY™

Tactical Buttons



STROBE READY™

In law enforcement, the strobe flashlight for self-defense is used on potential suspects who may present a danger but are not lethally armed. The strobe light is disorienting to the person it is aimed at, which makes it difficult for them to concentrate. Also, they avert their eyes away from the strobing effect. This means it is easier for the police to subdue successfully and control the suspect.

The 2nd Generation STROBE READY™ Technology is specially designed by NITECORE for tactical applications to enable a quick access to STROBE Mode with the dual tail switches and the inset pedal design to avoid accidental activation.

NITECORE Models: P10i, P20i UV, P10iX, P20iX, C17














STROBE READY!™
ULTIMATE ONE-HANDED OPERATION

2nd Generation STROBE READY™ Technology

- 1 Specially designed for tactical applications to enable a quick access to STROBE Mode (Patent No. ZL201320545349.4)
- 2 Inset pedal design to avoid accidental activation (US Patent No. 15/846299 US1023795581)

With advanced technologies and technical personnel, NITECORE has been keeping innovating over the years and has harvested over one hundred invention patents and utility model patents.






QUALITY ASSURANCE

NITECORE products combine advanced technology with precise design, undergo rigorous testing, and meet industry standards to deliver exceptional performance.



Luminous Flux Testing

NITECORE uses integrating spheres to accurately evaluate data such as luminous flux and color temperature.



Button Life Testing

NITECORE uses a button life testing machine to determine the buttons' durability and the compressive strength of the internal structure.



High and Low Temperature Testing

NITECORE uses a constant temperature and humidity test chamber to test the product performance in extreme temperature and humidity.



Aging Testing

NITECORE adjusts the product to its highest output and test its reliability by simulating long-term use conditions to ensure quality before shipment.



Battery Safety Testing

Rigorous tests are carried out on the battery, as well as to check the performance and lifespan of the battery in extreme environments.

WHEN THERE IS DARKNESS THERE IS A NITECORE LIGHT

SPORT

NITECORE is dedicated to equipping outdoor enthusiasts with high performance gear for every adventure - from trail running and hiking to mountaineering and camping. Our lightweight, multifunctional designs turn every detail of innovation into comfort and safety, enabling users to enjoy every moment outdoors to the fullest.



Trail Running

Recommended Models: UT27, UT2000, NU25 MCT, NU25 MCT UL, HA23 UHE, HC60 UHE, HC65 UHE



Mountaineering

Recommended Models: HC60 UHE, HC65 UHE, UT27, HC33, HA23 UHE



Ultralight

Recommended Models: NU20 Classic, NU25 MCT, NU25 MCT UL, NU21, NU27, MT1A Pro, MT2A Pro



Everyday Carry

Recommended Models: T4K, TIP3, TIKI, TINI3, E4K, MH12 Pro, MH25 Pro, MT1A Pro, MT2A Pro



Hiking

Recommended Models: NU27, NU25 MCT, NU33, NU40, NU43, NU50, HA13



Camping

Recommended Models: NU27, NU25 MCT, LR40, LR70, NU33, NU31, NU40, NU43



Caving

Recommended Models: HC60 UHE, HC65 UHE, NU33, NU40, NU43



Cycling

Recommended Models: BM06 + HC60 UHE/HC65 UHE




Fishing

Recommended Models: HA11, NU25 MCT, NU11



Diving

Recommended Model: DL30

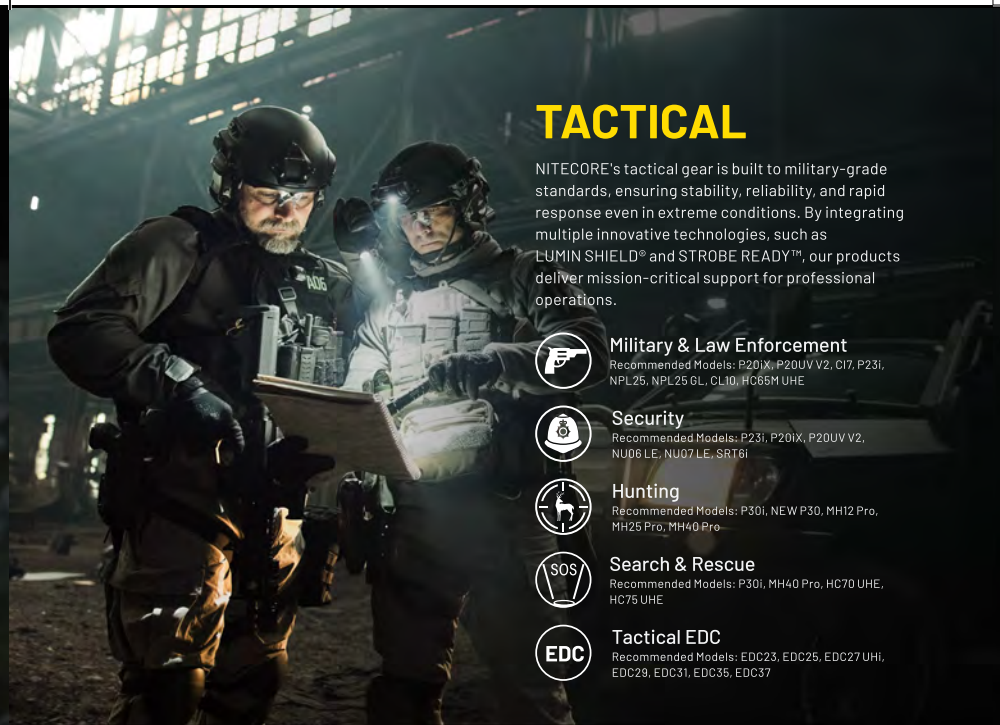

TACTICAL

NITECORE's tactical gear is built to military-grade standards, ensuring stability, reliability, and rapid response even in extreme conditions. By integrating multiple innovative technologies, such as LUMIN SHIELD® and STROBE READY™, our products deliver mission-critical support for professional operations.



Military & Law Enforcement

Recommended Models: P20IX, P20UV V2, C17, P23I, NPL25, NPL25 GL, CL10, HC65M UHE



Security

Recommended Models: P23I, P20IX, P20UV V2, NU06 LE, NU07 LE, SRT6I



Hunting

Recommended Models: P30I, NEW P30, MH12 Pro, MH25 Pro, MH40 Pro



Search & Rescue

Recommended Models: P30I, MH40 Pro, HC70 UHE, HC75 UHE



Tactical EDC

Recommended Models: EDC23, EDC25, EDC27 UHI, EDC29, EDC31, EDC35, EDC37

WORK

NITECORE is committed to delivering reliable and efficient professional solutions. Every product is rigorously tested and precision-engineered for performance and durability, from lighting and mosquito repelling devices to power solutions, all designed for industrial applications.



Maintenance

Recommended Models: EDC09, EDC17, EX7, NU50, HC65 UHE, HC75 UHE, HU2000, NWL30



Field Work

Recommended Models: EDC09, EDC17, EX7, HC65 UHE, HC75 UHE, HU2000, NWL30





HEADLAMP

NITECORE HEADLAMP GUIDE



	ENTRY LEVEL	PREMIUM	SUPERIOR
 Running	NU25 MCT Ultra Lightweight Multiple Color Temperatures Outdoor Headlamp 	UT27 High CRI Three Color Temperatures Lightweight Trail Running Headlamp 	UT2000 High CRI Three Color Temperatures Split-Type Trail Running Headlamp 
 Trekking	HA23 UHE Multiple Color Temperatures Lightweight AAA Headlamp 	HA27 UHE High CRI Multiple Color Temperatures Modular Headlamp 	HC65 UHE Ultra High Triple Output Metal Headlamp 
 Hiking	HA23 UHE Multiple Color Temperatures Lightweight AAA Headlamp 	HA27 UHE High CRI Multiple Color Temperatures Modular Headlamp 	HC65 UHE Ultra High Triple Output Metal Headlamp 
 Camping	HA23 UHE Multiple Color Temperatures Lightweight AAA Headlamp 	HA27 UHE High CRI Multiple Color Temperatures Modular Headlamp 	HC60 UHE High Performance Rechargeable Outdoor Headlamp 
 Industrial Maintenance	NU53 High Output Lightweight Industrial Headlamp 	HU2000 High Output Split-Type Work Headlamp 	HC75 UHE E-focus Work Headlamp 
 Fishing	NU11 Intelligent IR Sensor Clip-on Cap Light 	NU21 Ultra Lightweight Dual Beam Outdoor Headlamp 	NU30 Triple Output Lightweight Outdoor Headlamp 
 Caving	HU2000 High Output Split-Type Work Headlamp 	HC60 UHE High Performance Rechargeable Outdoor Headlamp 	HC75 UHE E-focus Work Headlamp 



NU

NU Series

NITECORE NU Series headlamps are lightweight and powered by built-in Li-ion batteries. They feature a uniform wide beam, powerful output for versatile outdoor adventures. The MCT (Multiple Color Temperatures) UHE LEDs allow users to switch between cool white, neutral white, and warm light to adapt to different environments. Crafted from durable PC materials, the NU Series is purpose-designed for trail running, trekking, hiking, camping, and more.

HOT SALE **NU25 MCT**

Ultra Lightweight Multiple Color Temperatures Outdoor Headlamp

- 400 Lumens
- 132 Meters
- 45 Hours
- 50g (1.76 oz)
- Built-in 700mAh Li-ion Battery
- USB-C Rechargeable



Features

MCT™ Self-developed Lighting System With Multiple Color Temperatures in All Primary Lights

The Lightest Generation Ever
↓ 10.7%


Dual Primary Lights Both with Three Color Temperatures



3000K Warm Light
Excellent penetrating ability in fog and rain while avoiding glare and reflection in snow



4500K Neutral White Light
Suitable for various outdoor activities



6500K Cool White Light
Striking and refreshing during long hikes or runs

HOT SALE **NU25 MCT UL**



Ultra Lightweight Multiple Color Temperatures Outdoor Headlamp

- 400 Lumens
- 132 Meters
- 45 Hours
- 47g (1.66 oz)
- Built-in 700mAh Li-ion Battery
- USB-C Rechargeable



Headlamp

Flashlight

Power-Solution

Mosquito Protection

Fan

Explore More

NU27 **MCT**

Ultra Lightweight Multiple Color Temperatures Outdoor Headlamp

- NiteLab MCT UHE LEDs
- 600 Lumens
- 123 Meters
- 57 Hours
- 56g (1.98 oz)
- Built-in 850mAh Li-ion Battery
- USB-C Rechargeable



2 Colors Available

Features

Industry's First MCT Outdoor Headlamp

Neutral White (4,500K)
For various activities

Warm Light (3,000K)
Excellent penetrating ability in fog and rain while avoiding glare and reflection in snow

Cool White (6,500K)
Helps you be wakeful and attentive



3 Colors Available

NU21

Ultra Lightweight Dual Beam Outdoor Headlamp

	360 Lumens
	58 Meters
	Built-in 500mAh Li-ion Battery
	USB-C Rechargeable
	44g (1.55 oz)



NU20 Classic

Ultra Lightweight Outdoor Headlamp

	360 Lumens
	109 Meters
	Built-in 500mAh Li-ion Battery
	USB-C Rechargeable
	38g (1.34 oz)



NU33

Triple Output USB-C Rechargeable Headlamp

- 700 Lumens
- 135 Meters
- 147 Hours
- 95.5g (3.37 oz)
- Built-in 2,000mAh Li-ion Battery
- USB-C Rechargeable



Features

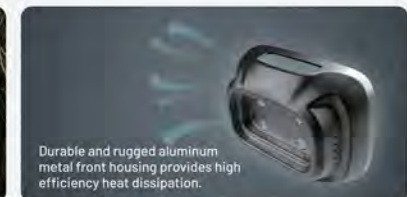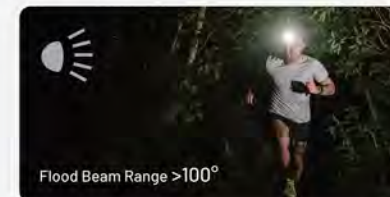

Triple Light Sources

NU30

Triple Output Lightweight Outdoor Headlamp

	500 Lumens
	130 Meters
	Built-in 1,500mAh Li-ion Battery
	USB-C Rechargeable
	90g (3.17 oz)



3 Colors Available

NU31

Triple Output Lightweight USB-C Rechargeable Headlamp

	550 Lumens
	145 Meters
	Built-in 1,800mAh Li-ion Battery
	USB-C Rechargeable
	95.5g (3.37 oz)

NU43

High Output Lightweight 18650 Rechargeable Headlamp

- 1,400 Lumens 130 Meters
- 116g (4.09 oz)
- 3,400mAh (Built-in 18650 Li-ion Battery)
- USB-C Rechargeable

Features

- HIGH (600 Lumens) **10** Hours
- MID (300 Lumens) **15** Hours
- LOW (100 Lumens) **29** Hours

Ultra Smooth TrueVision™ Technology

Near-Center of Gravity Bracket

Skin Friendly Widened Headband

Sensor Protection Function

IP68 Rated

Lockout Mode



NU40

High Performance Lightweight USB-C Rechargeable Headlamp

	1,000 Lumens
	100 Meters
	2,600mAh (Built-in 18650 Li-ion Battery)
	USB-C Rechargeable
	116g (4.09 oz)
	IP68



NU45

High Output Lightweight 18650 Rechargeable Headlamp

	1,700 Lumens
	172 Meters
	4,000mAh (Built-in 18650 Li-ion Battery)
	USB-C Rechargeable
	126g (4.44 oz)
	IP68



NU50

Superior Performance 21700 USB-C Rechargeable Headlamp

	1,400 Lumens
	130 Meters
	5,000mAh (Built-in 21700 Li-ion Battery)
	USB-C Rechargeable
	146g (5.15 oz)
	IP68



NU53

High Output Lightweight Industrial Headlamp

	1,800 Lumens
	175 Meters
	6,000mAh (Built-in 21700 Li-ion Battery)
	USB-C Rechargeable
	151g (5.33 oz)
	IP68



Headlamp

Flashlight

Power Solution

Mosquito Protection


Fan

Explore More

NU11

Intelligent IR Sensor Clip-on Cap Light

- 150 Lumens
- 50 Meters
- 6 Hours
- 41g (1.45 oz)
- Built-in 600mAh Li-ion Battery
- Motion Sensor
- USB-C Rechargeable

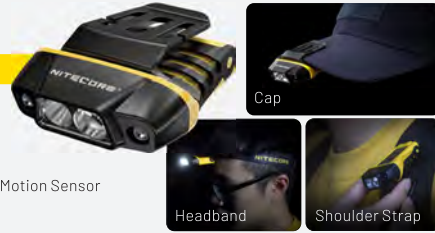

Helmet Accessories

Specially designed for attaching NU Series headlamps to the helmets

Helmet Mount Base



HMB1

Universal Helmet Mount Base

HMB1S

Sport Helmet Mount Base

HMB1 TAC

Tactical Helmet Mount Base

Headlamp Bracket



HLB20

Compatible with NITECORE NU21, NU25, NU25 UL and more

HLB30

Compatible with NITECORE NU31, NU33 and more

HLB40

Compatible with NITECORE NU40, NU43 and more

HLB50

Compatible with NITECORE NU50 and more



Ideal Choices for Longer Headlamp Runtime

Carbon Battery™ 6K Kit

Extended Headlamp Runtime Kit

- 6,000mAh 3.6V (21.6Wh)
- 134g (4.73 oz) Total Weight
- IP68



Carbon Battery™ 12K Kit

Extended Headlamp Runtime Kit

- Runtime up to
- Paired with NU45: 2.5x longer
- Paired with NU53: 2x longer
- Paired with HC65 UHE: 2x longer



Red Safety Rear Light

- 12,000mAh 3.6V (43.2Wh)
- 30W Max Output
- IP68

18650 Extension Battery Case

Always Ready to Use

Battery Option:
18650 Li-ion battery (Flat Top Battery Excluded)



* Battery Not Included

All of them are compatible with the HC65 UHE, HC60 UHE, HC75 UHE, HC70 UHE, NU53, NU50, NU43, NU40, and more.

Signal Light



NU05 V2

Ultra Lightweight USB-C Rechargeable Headlamp Mate

	4 x High Performance LEDs	4 x High Performance LEDs
	40 Lumens	15 Lumens
	47 Hours	75 Hours
	USB-C Rechargeable	USB-C Rechargeable
	11.1g (0.39 oz)	15.8g (0.56 oz)
Light Sources		
Modes	5 Modes (Red Indicator Slow Flashing + 2 Colors Slow Flashing + Red Light Quick Flashing + White Light Constant-on)	9 Modes (4 Colors Constant-On + 4 Colors Flashing + Red/Blue Police Warning Flashing)



NU06 LE

Mini Signal Light Law Enforcement Version



NU06 MI

IR Mini Signal Light Military Version

	4 x High Performance LEDs	5 x High Performance LEDs
	8 Lumens	15 Lumens
	75 Hours	50 Hours
	USB-C Rechargeable	USB-C Rechargeable
	16.7g (0.59 oz)	24.5g (0.86 oz)
Light Sources		
Modes	9 Modes (3 Colors Constant-On/Flashing + Red/Blue Police Warning Flashing + IR Constant-On/Flashing)	11 Modes (5 Colors Constant-On + 5 Colors Flashing + Red/Blue Police Warning Flashing)



NU07 LE

Rechargeable Signal Light Law Enforcement Version

UT UT Series

The UT Series is specially designed and optimized for trail runners in nighttime or in rain, snow or fog. Compared to marathons, trail races usually feature a longer distance, a steeper gradient and a longer duration with higher requirements on personal equipment, among which is the mandatory lighting gear.

NITECORE Ambassador
Katie Schide
 2024 1st UTMB
 2025 1st Hardrock 100



- Headlamp
- Flashlight
- Power Solution
- Mosquito Protection
- Fan
- Explore More

NEW

UT27

High CRI Three Color Temperatures
Lightweight Trail Running Headlamp


- NiteLab MCT UHE LEDs
- 800 Lumens
- 168 Meters
- 14 Hours 30 Minutes
- 74g (2.61 oz)
- HLB1500 Li-ion Battery Pack
3 x AAA



2 Colors Available

Features

Debut
Variable CRI
Multiple Color Temperatures LED



First in the Industry
Three Color Temperatures & Three CRI Options

<p>CRI 97 3000K Warm Light Ensuring clear visual perception in high-risk environments</p> <ul style="list-style-type: none"> Rain & Fog Snowfall 	<p>CRI 83 4500K Neutral White Light Fearless in medium-risk technical terrain</p> <ul style="list-style-type: none"> Steep Slopes Muddy Terrain Stream Trekking Snow-Covered Trails 	<p>CRI 73 6500K Cool White Light Ready for low-risk everyday environments with superior brightness and efficiency, and extended runtime</p> <ul style="list-style-type: none"> Camping Urban Night Running
---	--	---

Dual Power Options

HLB1500
Rechargeable Li-ion Battery Pack
(1,500mAh) Included
High Capacity, Long Runtime,
Efficient Illumination

Compatible with
3 x AAA Alkaline Batteries
Low-Cost and Widely Available



Glow-in-the-dark Battery Compartment

(Invention Patent No. ZL202110998288.6)
(Utility Patent No. ZL202122056854.X)

Quick Installation at a Glance

The glow-in-the-dark design enables quick identification of the battery compartment in the dark, making battery replacement faster and easier.



NEW

UT2000

High CRI Three Color Temperatures
Split-Type Trail Running Headlamp

- NiteLab MCT UHE LEDs
- 2,000 Lumens
- 220 Meters
- IP68
- USB-C Powered
- Carbon Battery™ 12K (12000mAh)



Features



Split Type Design
Carbon Battery™ 12K Included

USB-C Extension Cable
Compatible with
higher capacity power banks



Headlamp

Flashlight

Power Solution

Mosquito Protection

Fan

Explore More



ULTRA LIGHTWEIGHT

Trail Running Lighting & Power Solutions

>100KM

UT27 **MCT6**
800 Lumens 74 g
(2.81 oz)



UT2000 **MCT6**
2000 Lumens USB-C Powered



NB Plus
10,000mAh Power Bank

155 g (5.47 oz)



50-100KM

UT27 **MCT6**
800 Lumens 74 g
(2.81 oz)



UT2000 **MCT6**
2000 Lumens USB-C Powered



NB Plus
10,000mAh Power Bank

155 g (5.47 oz)



<50KM

UT27 **MCT6**
800 Lumens 74 g
(2.81 oz)



NB Air
5,000mAh Power Bank

89 g (3.14 oz)



Headlamp

Flashlight

Power Solution

Mosquito Protection

Fan

Explore More

H Headlamp Series

NITECORE Headlamp Series offers high performance and ultra lightweight headlamps, featuring a replaceable battery and powerful output. These headlamps enable users to tackle various challenges quickly and efficiently, ideal for military applications, search and rescue, industrial safety, outdoor sports, and more.


NEW HA27 UHE

High CRI Multiple Color Temperatures
Modular Headlamp

- NiteLab MCT UHE LEDs
- 800 Lumens 150 Meters
- 75g (2.65 oz) IPX6
- NITECORE HLB1500 Li-ion Battery Pack / 3 × AAA

Features

MCT™ 3000K Warm Light **CRI 97** 4500K Neutral White Light **CRI 83** 6500K Cool White Light **CRI 73**

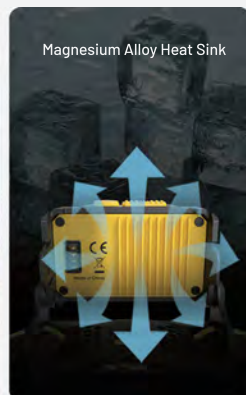

HA23 UHE



Multiple Color Temperatures
Lightweight AAA Headlamp

- NiteLab MCT UHE LEDs
- 600 Lumens 132 Meters
- 56g (1.98 oz) IP68
- NITECORE HLB1500 Li-ion Battery Pack / 3 × AAA



3 Colors Available



Dual Battery Options



HLB1500 Li-ion Battery Pack



3 × AAA Batteries



HA11



HA13



HA15 UHE

	Multipurpose Ultra Lightweight AA Headlamp	Multipurpose Dual Beam AAA Headlamp	Multipurpose Ultra Lightweight AA Headlamp
☀️	240 Lumens	350 Lumens	400 Lumens
📏	90 Meters	120 Meters	80 Meters
🔋	1×AA / 1×14500	3 × AAA / 1×HLB1300	1× AA / 1×14500
👤 (Battery Not Included)	38g (1.34 oz)	67g (2.36 oz)	43g (1.52 oz)

NEW HA25 UHE



Multiple Color Temperatures Outdoor Headlamp

- NiteLab MCT UHE LEDs
- 800 Lumens 120 Meters
- 65g (2.29 oz) IP66
- NITECORE HLB1500 Li-ion Battery Pack / 3 × AAA



HU2000

High Output Split-Type Work Headlamp

- NiteLab UHE LED
- 2,000 Lumens 160 Meters
- USB-C Powered



With the NB10000:
17h Runtime



With the Carbon Battery™ 12K
Extended Headlamp Runtime Kit:
17h Runtime



USB-C Extension Cable
Compatible with most power banks

Split-Type Design
Ideal for keeping warm

HOT SALE

HC65 UHE

Ultra High Triple Output Metal Headlamp



- NiteLab UHE LED
- 2,000 Lumens
- 82 Hours
- IP68 (Internal Waterproofing)
- 4,000mAh 18650 Li-ion Battery
- 222 Meters
- 152g (5.36 oz)
- 2m Impact Resistant
- USB-C Rechargeable

2 Colors Available

Features

TrueVision+
Light Transmission > 94%

42mm Surface Light

Over 100° Beam Angle of Primary Light

Primary White Light

Auxiliary High CRI White Light (CRI≥90)

Auxiliary Red Light

Wide Compatibility

18650 Extension Battery Case

Carbon Battery™ 6K Extended Headlamp Runtime Kit

HLB40 Headlamp Bracket + HMB1/HMB1S/HMB1 TAC Helmet Mount Bases

BM06 Headlamp Bike Mount

Various Activities

Camping

Climbing

Trekking

Night Running

Road Trip

Emergency Lighting



HC65M UHE

Ultra High Triple Output Metal Tactical Headlamp



HC60 UHE

High Performance Rechargeable Outdoor Headlamp



- NiteLab UHE LED
- 1,600 Lumens
- 200 Hours
- 4,000mAh 18650 Li-ion Battery
- USB-C Rechargeable
- 157 Meters
- 140g (4.94 oz)



HC70 UHE

High Performance 21700 Rechargeable Work Headlamp



HC75 UHE

E-focus Work Headlamp

	NiteLab UHE LED	NiteLab UHE LED
	1,600 Lumens	3,000 Lumens
	156 Meters	192 Meters
	6,000mAh 21700 Li-ion Battery	5,500mAh 21700 Li-ion Battery
	USB-C Rechargeable	USB-C Rechargeable
	172g (6.07 oz)	209g (7.37 oz)
	IP68	IP68



HC33


High Performance L-shaped Headlamp



HC35

Next Generation 21700 L-shaped Headlamp


	CREE XHP35 HD LED	4 × CREE XP-G3 S3 LEDs
	1,800 Lumens	2,700 Lumens
	187 Meters	134 Meters
	1 × 18650, 2 × CR123/RCR123	1 × 21700, 1 × 18650, 2 × CR123/RCR123
	330 Hours	1,200 Hours
	51.2g (1.80 oz)	138.5g (4.88 oz)

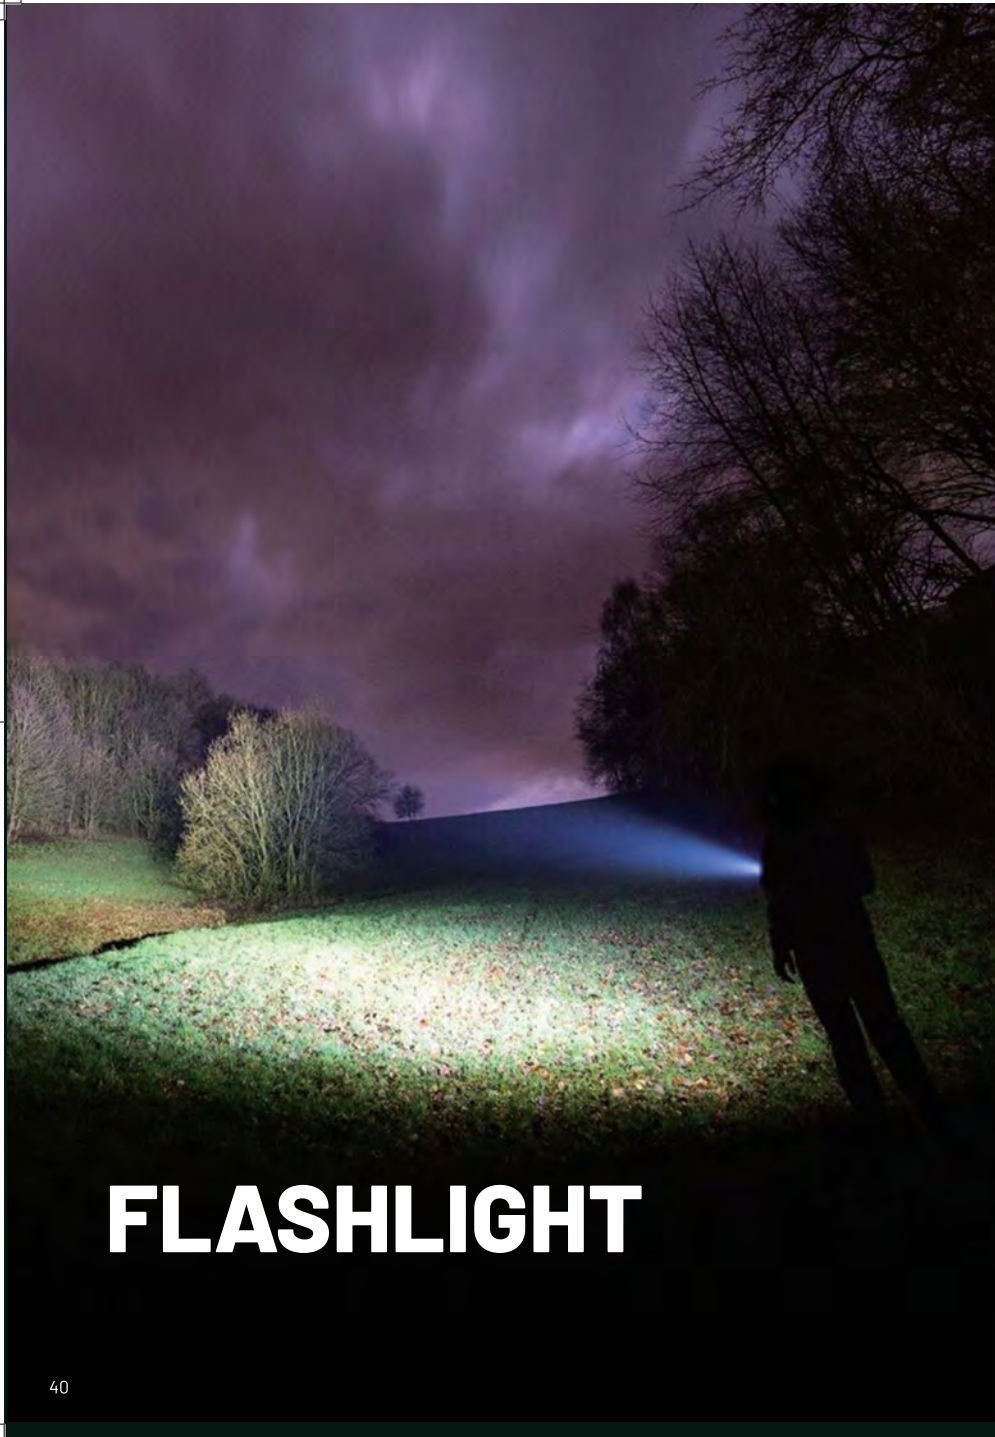

FLASHLIGHT

Tactical EDC Flashlight Comparison Guide >>

	EDC23	EDC27 UHi	EDC29	EDC31	EDC35	EDC37
Max Output	2500 Lumens	3100 Lumens	6500 Lumens	3500 Lumens	5000 Lumens	★ 8000 Lumens
Max Throw	280 Meters	305 Meters	400 Meters	380 Meters	★ 550 Meters	420 Meters
Battery Capacity	1500mAh Li-ion Battery	1700mAh Li-ion Battery	2500mAh Li-ion Battery	3800mAh Li-ion Battery	6000mAh Li-ion Battery	★ 8000mAh Li-ion Battery
Runtime (MID Level)	3h 45min (200 Lumens)	4h 20min (200 Lumens)	3h (400 Lumens)	5h (300 Lumens)	9h 15min (300 Lumens)	8h 30min (400 Lumens)
Charging Port	USB-C	USB-C	USB-C	USB-C	USB-C	USB-C 18W Fast Charging
Button Design	Dual-Stage Tactical Buttons	Dual-Stage Tactical Buttons	Dual-Stage Tactical Buttons	Single Tactical Tail Button	Single Tactical Tail Button	Dual-Stage Tactical Buttons (One allows customization.)
Weight	101g / 3.56 oz	122g / 4.30 oz	160g / 5.64 oz	★ 100g / 3.53 oz	171g / 6.03 oz	199g / 7.02 oz
Length	★ 102.8mm / 4.05"	135.3mm / 5.33"	133.5mm / 5.26"	113.2mm / 4.46"	124.3mm / 4.89"	108.0mm / 4.25"
Material	Stainless Steel	Stainless Steel	Stainless Steel	Aluminum Alloy	7000 Series Aluminum Alloy	Stainless Steel
LUMIN SHIELD®	X	X	✓	✓	✓	✓
STROBE	✓	✓	✓	X	X	✓
Rapid Lock™	✓	X	✓	✓	✓	✓
OLED Display	✓	✓	✓	X	X	✓
Brightness Level Preset	✓	✓	✓	X	X	✓
IP Rating	IP54	IP54	IP54	IP68	IP68	IP54

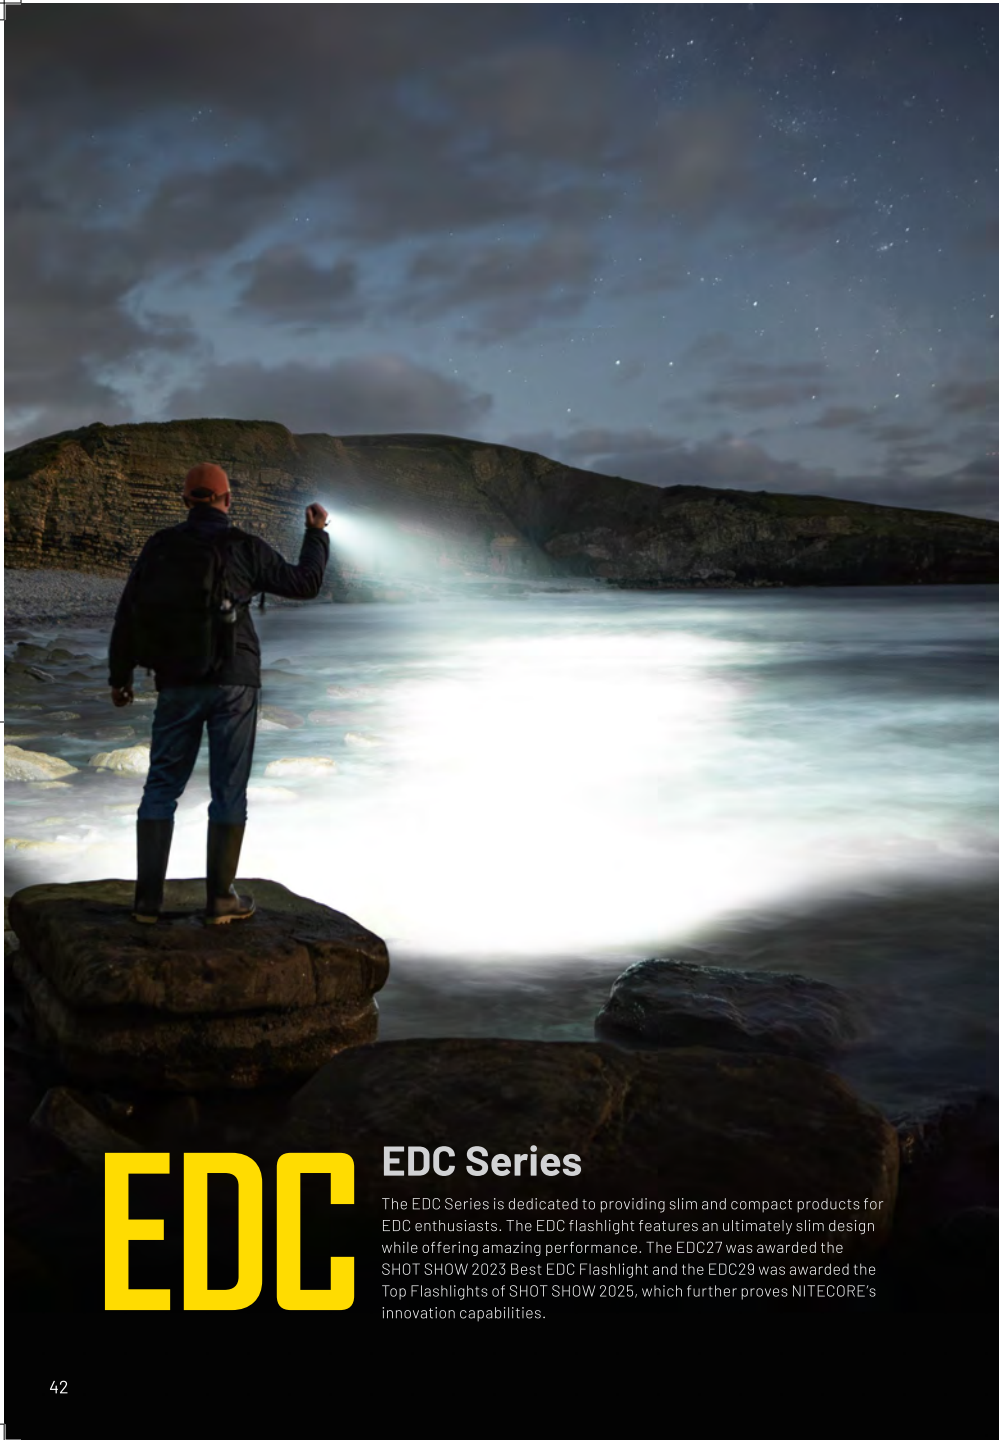

EDC

EDC Series

The EDC Series is dedicated to providing slim and compact products for EDC enthusiasts. The EDC flashlight features an ultimately slim design while offering amazing performance. The EDC27 was awarded the SHOT SHOW 2023 Best EDC Flashlight and the EDC29 was awarded the Top Flashlights of SHOT SHOW 2025, which further proves NITECORE's innovation capabilities.





HOT SALE **EDC37**

Ultimate Tactical EDC Flashlight

- 2 x NiteLab UHi 20 MAX LEDs
- 8,000 Lumens 420 Meters
- 190 Hours 199g (7.02 oz)
- Built-in 8,000mAh Li-ion Battery
- USB-C Rechargeable



Features



NEW EDC07 MCT

High CRI Three Color Temperatures EDC Flashlight

- NiteLab MCT UHE LEDs
- 1,500 Lumens 132 Meters
- Built-in 1,500mAh Li-ion Battery
- USB-C Rechargeable
- STROBE Mode



NEW EDC09 MCT

High CRI Three Color Temperatures Adjustable Angle EDC Flashlight

- NiteLab MCT UHE LEDs
- 1,600 Lumens 153 Meters
- 250 Hours 114g(4.02 oz)
- Built-in 1,100mAh Li-ion Battery
- USB-C Rechargeable



Features

<p>CRI 97 3000K Warm Light</p> <p>Ensuring accurate acquisition of real-world object details</p> <ul style="list-style-type: none"> Rain / Fog / Smoke Line / Label Inspection Plant / Crop Observation 	<p>CRI 83 4500K Neutral White Light</p> <p>Natural and soft, perfect for extended work and daily use</p> <ul style="list-style-type: none"> Versatile Applications Emergency Lighting Low-light Work 	<p>CRI 73 6500K Cool White Light</p> <p>Suitable for high-output, long-range lighting applications</p> <ul style="list-style-type: none"> Night Patrol Camp Lighting Outdoor Exploration
---	--	--

NEW EDC17

Three Light Sources Ultra Slim EDC Flashlight



- NiteLab UHI 25 LED
- 1,500 Lumens 230 Meters
- 260 Hours 106g(3.74 oz)
- Built-in 1,500mAh Li-ion Battery
- USB-C Rechargeable



* Laser products are available in some countries/regions, subject to local regulations.





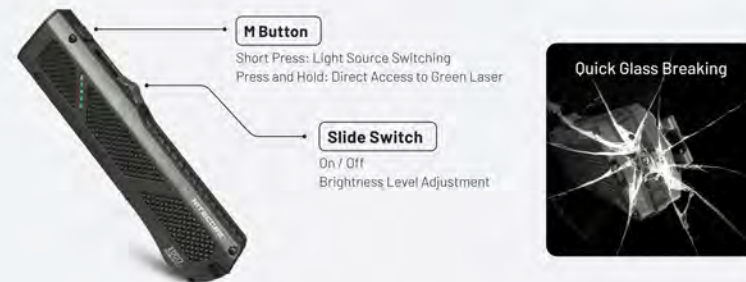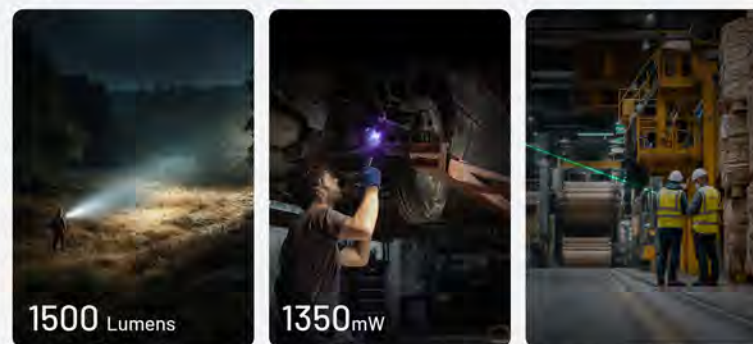


Features

- White Light**
Illuminate the View
- UV Light**
Identification & Detection
- Green Laser**
Positioning & Aiming



HOT SALE **EDC29**

Ultra Slim High Performance EDC Flashlight

-  2 × NiteLab UHi 20 MAX LEDs
-  6,500 Lumens  400 Meters
-  61 Hours  160g (5.64 oz)
-  Built-in 2,500mAh Li-ion Battery
-  USB-C Rechargeable

Features



reddot winner 2025




6500 Lumens
LUMIN SHIELD® + STROBE



Dual-stage Tactical Buttons

M-TURBO

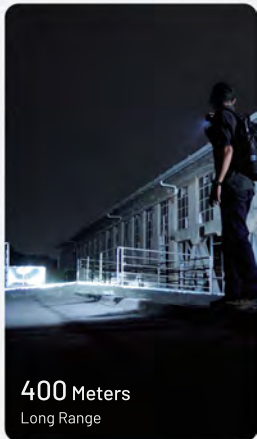


400 Meters
Long Range




Extensive
Armor-Style Anti-Slip Texture



2 × UHi 20 MAX LEDs



Multifunctional OLED
Display



Rapid Lock™






EDC23

Ultra Slim Pocket Tactical EDC Flashlight



EDC27 UHi

Ultra Slim Tactical EDC Flashlight

	2 × NiteLab UHi 25 LEDs	2 × NiteLab UHi 20 LEDs
	2,500 Lumens	3,100 Lumens
	280 Meters	305 Meters
	Built-in 1,500mAh Li-ion Battery	Built-in 1,700mAh Li-ion Battery
	USB-C Rechargeable	USB-C Rechargeable








EDC31


Compact Tactical EDC Flashlight



EDC35

Tactical EDC Flashlight

	NiteLab UHi 20 MAX LED	NiteLab UHi 40 MAX LED
	3,500 Lumens	5,000 Lumens
	380 Meters	550 Meters
	Built-in 3,800mAh 18650 Li-ion Battery	Built-in 6,000mAh 21700 Li-ion Battery
	USB-C Rechargeable	USB-C Rechargeable

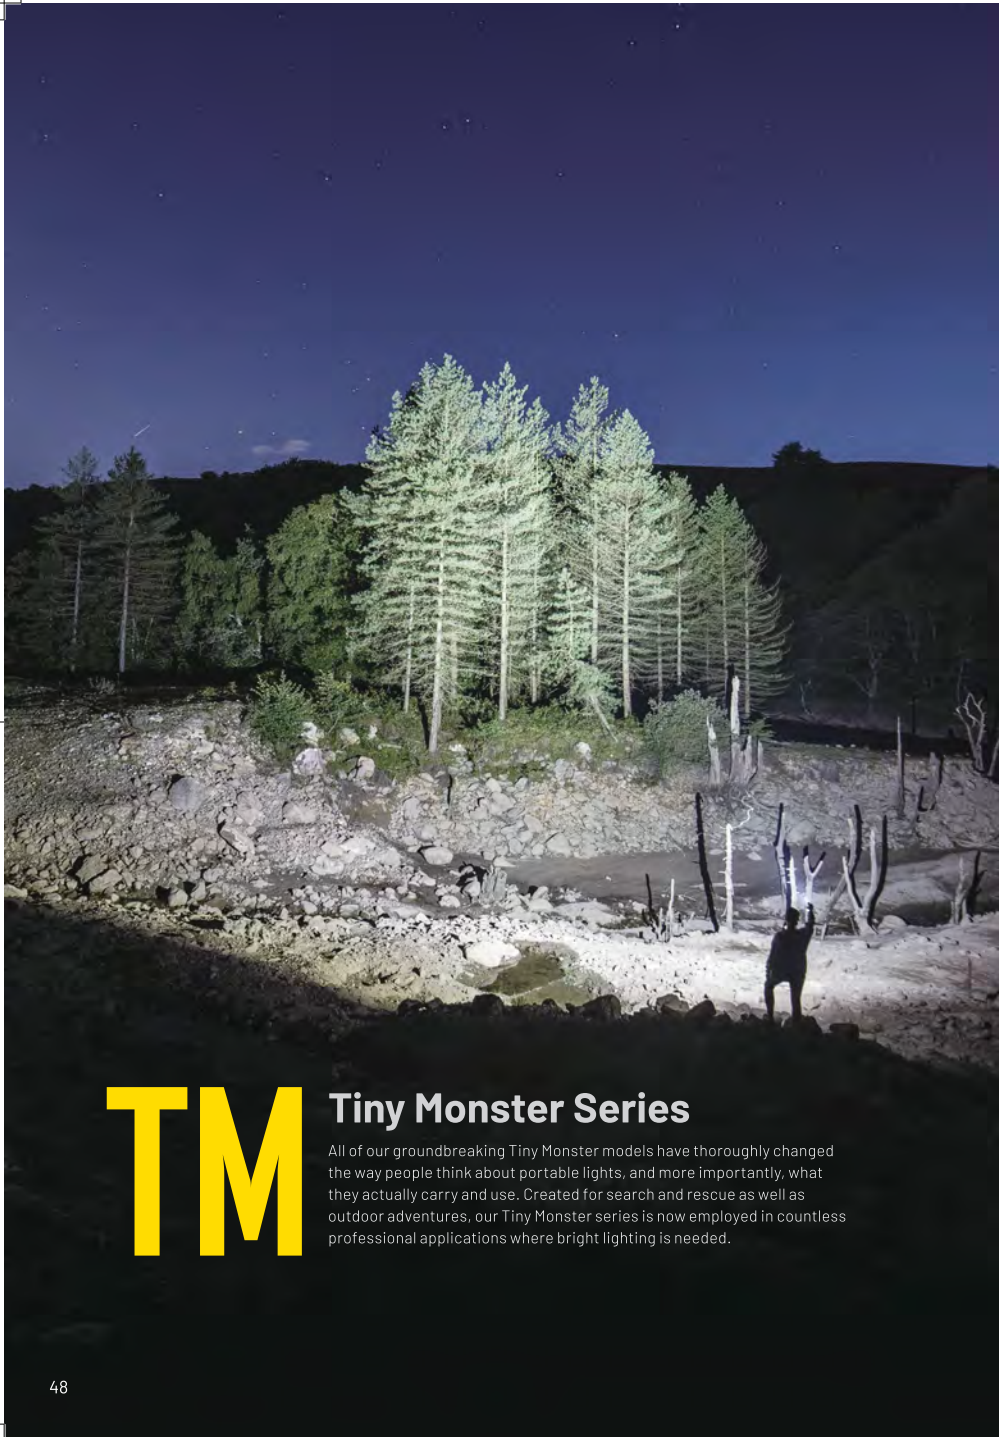

TM Tiny Monster Series

All of our groundbreaking Tiny Monster models have thoroughly changed the way people think about portable lights, and more importantly, what they actually carry and use. Created for search and rescue as well as outdoor adventures, our Tiny Monster series is now employed in countless professional applications where bright lighting is needed.

HOT SALE

TM9K Pro



High Output Self-Defense Tactical Flashlight

- 3 × NiteLab UHi 40 MAX LEDs
- 9,900 Lumens 510 Meters
- Built-in 5,000mAh Li-ion Battery
- USB-C Rechargeable



TM12K



Compact and Intelligent Sharp Light

- 6 × CREE XHP50 LEDs
- 12,000 Lumens 250 Meters
- 200 Hours 233g / 8.22 oz
- Built-in 4,800mAh 21700 Li-ion Battery
- USB-C Rechargeable



TM20K



reddot winner 2022

Ultra High Performance Tactical Searchlight

- 19 × CREE XP-L2 LEDs
- 20,000 Lumens 290 Meters
- Built-in Li-ion Battery
- USB-C Rechargeable



TM39

Ultra High Performance Superior Searchlight

- LUMINUS SBT-90 GEN2 LED
- 5,200 Lumens 1,500 Meters
- NBP68HD Battery Pack
- DC Rechargeable



Headlamp

Flashlight

Power-Solution

Mosquito Protection

Fan

Explore More



P Precise Series

NITECORE Precise Series flashlights are highly innovative illumination tools purpose-designed for law enforcement, hunting and tactical applications. With blazingly bright output in TURBO/STROBE mode, exceptionally long runtimes in low mode and unique gun-mounting functionality, the Precise series flashlights are the ultimate lighting tools for increased tactical effectiveness.

STROBE READY!™ The Strobe Ready™ is designed with the lever principle, providing a maximum ease of use with glove.



P20iX

STROBE READY!™
ULTIMATE ONE-HANDED OPERATION

Xtreme Performance i-Generation 21700 Tactical Flashlight

- 4 × CREE XP-L2 V6 LEDs
- 4,000 Lumens 221 Meters
- 1 × 21700i Series Battery, 2 × CR123
- USB-C Rechargeable

Features



Inset Pedal Design with dual tail switches

Strike bezel uses high strength silicon nitride ceramics

- + STROBE Mode uses randomly changing frequencies for stronger dizzying effects
- + Tactical Mode and Daily Mode available
- + The power indicator indicates the remaining battery power



Security



Search & Rescue



Self Defense

Anti-impact reverse polarity protection mechanism for shooting sports

Compatible with various i Series modular extensions



RSW2i
USB-C Remote Switch



RSW2i WL
Wireless Remote Switch



TSL10i
Tail Cap Signal Light

P20i UV

STROBE READY!™
ULTIMATE ONE-HANDED OPERATION

i-Generation 21700 White + UV Dual Output Flashlight

- Luminus SST-40-W LED + 4 × UV LEDs
- 1,800 Lumens 337 Meters
- 320mW 365nm
- USB-C Rechargeable
- 1 × 21700 i Series Battery, 2 × CR123/RCR123



P20UV V2

STROBE READY!™
ULTIMATE ONE-HANDED OPERATION

White + UV Dual Output Tactical Flashlight

- CREE XP-L2 V6 LED + 4 × UV LEDs
- 1,000 Lumens 164 Meters
- 320mW 365nm
- USB-C Rechargeable
- 1 × 18650, 2 × CR123/RCR123



P10ix

STROBE READY!
ULTIMATE ONE-HANDED OPERATION

Xtreme Performance i-Generation 21700 Ultra Compact Flashlight

- 4 × CREE XP-L2 V6 LEDs
- 4,000 Lumens 158 Meters
- 1 × 21700 i-Series Battery, 2 × CR123/RCR123
- USB-C Rechargeable



P10i

STROBE READY!
ULTIMATE ONE-HANDED OPERATION

i-Generation 21700 Ultra Compact Tactical Flashlight

- Luminus SST-40-W LED
- 1,800 Lumens 290 Meters
- 1 × 21700 i-Series Battery, 2 × CR123/RCR123
- USB-C Rechargeable



P23i

STROBE READY!
ULTIMATE ONE-HANDED OPERATION

i-Generation Long Range 21700 Tactical Flashlight

- Luminus SFT-70 LED
- 3,000 Lumens 470 Meters
- 1 × 21700 i-Series Battery
- USB-C Rechargeable



NEW P30

Next Generation 21700 Hunting Flashlight

- CREE XP-L HI V3 LED
- 1,000 Lumens 618 Meters
- 1 × 21700 / 1 × 18650
2 × CR123/RCR123



NEW P30 KIT

NEW P40

LASER 1

Ultra-Long Throw Dual Beam LEP Flashlight

- 5 × Floodlight LEDs, Class 1 LEP Light
- 2,000 Lumens 2,900 Meters
- 1 × 21700
- USB-C Rechargeable



18W USB-C
Fast Charging

* Laser products are available in some countries/regions, subject to local regulations.

Features

Adaptive Cruise Mode Automatic Brightness Control



Spotlight / Floodlight Adjustment



Spotlight:
Long-distance Search / Rescue

Floodlight:
Close-range Lighting / Maintenance /
Emergency Response / Adventure

Mixed Light:
General Use


P30i

i-Generation 21700 High Output Searchlight

- CREE XHP35 HI LED
- 2,000 Lumens 1,000 Meters
- 1 × 21700 i-Series Battery
2 × CR123/RCR123
- USB-C Rechargeable



P30i KIT

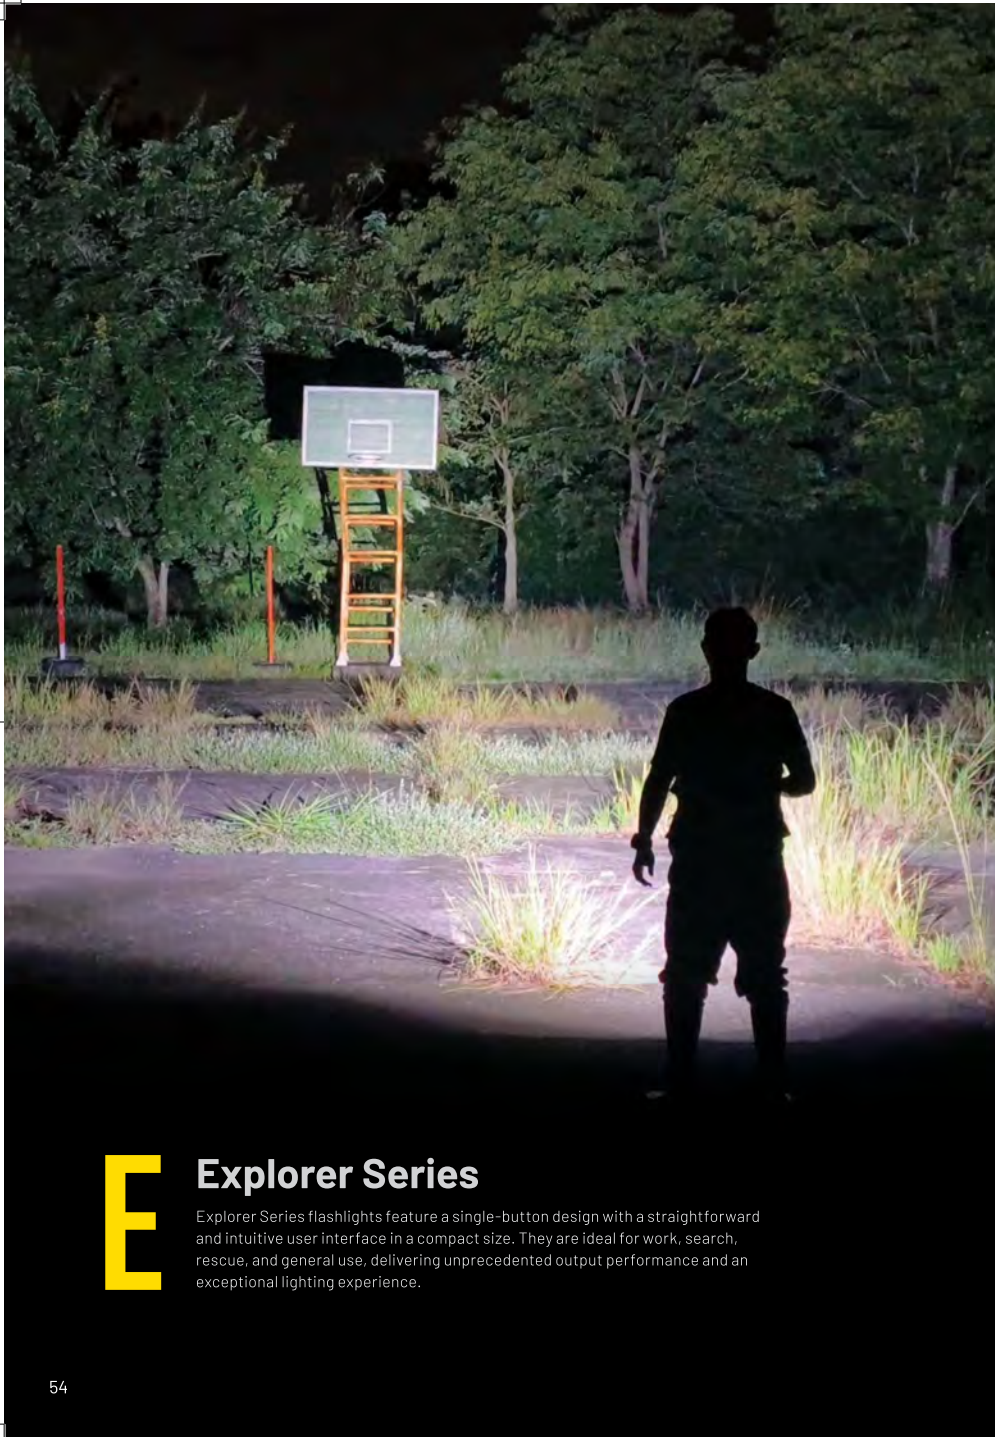

E Explorer Series

Explorer Series flashlights feature a single-button design with a straight forward and intuitive user interface in a compact size. They are ideal for work, search, rescue, and general use, delivering unprecedented output performance and an exceptional lighting experience.

NEW EX7

Variable Beam Pattern High Performance Flashlight

- 4 × NiteLab M515S LEDs
- 6,000 Lumens 500 Meters
- 570 Hours 140g (4.94 oz)
- 1 × 21700
- USB-C Rechargeable



Features

<p>Global Debut M515S Array LED</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>Central High Luminous Density & Long Throw Core</p> </div> <div style="text-align: center;"> <p>Peripheral High Efficiency Flood Core</p> </div> </div>	<p>6000-Lumen</p>	<p>Randomly Changing STROBE Mode</p>
<p>Three Beam Patterns Spotlight / Floodlight / Mixed Light</p> <div style="display: flex; flex-direction: column;"> <div style="margin-bottom: 5px;"> <p>Spotlight: search /rescue</p> </div> <div style="margin-bottom: 5px;"> <p>Floodlight: pathway lighting, area lighting</p> </div> <div> <p>Mixed Light: general use</p> </div> </div>	<p>IP68 All-Weather Applicable 2m Submersible 2m Impact Resistant</p>	<p>500 Meters Max Throw</p>
	<p>Two-Way Clip Included</p>	

Headlamp

Flashlight

Power-Solution

Mosquito Protection

Fan

Explore More



MH Multitask Hybrid Series

NITECORE Multitask Hybrid (MH) dual-fuel rechargeable flashlights are a line of highly versatile and practical illumination tools designed for a multitude of users and applications. Featuring a high-precision long-range reflector, well-spaced brightness settings plus STROBE and SOS modes, the MH series is the ultimate lighting tools for hunting, trekking, camping, law enforcement, search and rescue.

HOT SALE

MH12 Pro

Superior Performance USB-C Rechargeable Compact Flashlight


-  NiteLab UHI 40 LED
-  USB-C Rechargeable
-  3,300 Lumens
-  605 Meters
-  1 × 21700

Features

Intuitive Indicators



User-Friendly Operation








High Capacity Li-Ion Battery Included (NL2153HP 5,300mAh)



MH12 Pro KIT

MH10 V2






Next Generation 21700 Dual Fuel EDC Flashlight

-  CREE XP-L2 V6 LED
-  USB-C Rechargeable
-  1,200 Lumens
-  202 Meters
-  1 × 21700, 1 × 18650, 2 × CR123/RCR123



MH11

USB-C Rechargeable Ultra Compact Flashlight

-  CREE XP-L2 V6 LED
-  USB-C Rechargeable
-  1,000 Lumens
-  190 Meters
-  1 × 18650, 2 × CR123/RCR123





MH40 Pro

Ultra Bright Long Range Hunting Flashlight

- NiteLab UHI 40 MAX LED
- USB-C Rechargeable
- 3,500 Lumens
- 1,300 Meters
- NITECORE NBPI00R Li-ion Battery Pack, 2 x 21700

Features



2.4G Wireless Control

Multiple Tactical Accessories Included:



Hook-and-Loop Fastener

Picatinny Rail Mounts (Optional)

Hook-and-Loop Straps



NBP100R Li-ion Battery Pack Included (10,000mAh)



MH40 Pro KIT

MH25 Pro

Ultra Long Range USB-C Rechargeable Flashlight

- NiteLab UHI 40 LED
- 3,300 Lumens
- 705 Meters
- 1 x 21700
- USB-C Rechargeable



MH25 Pro KIT



High Capacity Li-ion Battery Included (NL2153HP 5,300mAh)

Smart Ring Tactical Series

NITECORE SRT Series features 4th generation SSR (Smart Selector Ring) technology, offering variable brightness adjustment and unprecedented ease of use. The SSR interface allows users to select modes and brightness levels by simply rotating a smooth magnetic ring. This industry leading design is both user-friendly and extremely durable, making it ideal for law enforcement and tactical applications.



4th Generation Smart Selector Ring



SRT6i

High Performance SmartRing Tactical Flashlight

- 2,100 Lumens
- 510 Meters
- 1 x 21700 iSeries Battery, 2 x CR123/RCR123
- USB-C Rechargeable



Security



Military & Law Enforcement

Chameleon Series

The Chameleon Series is yet another unique and innovative offering from NITECORE. Featuring the white output and another choice of Red, Green, Blue, Ultraviolet or Infrared, Chameleon flashlights offer incredible versatility for a wide range of applications. The latest model has an easy and unique switching mechanism combined with our patented STROBE READY™ Technology.

C17

STROBE READY™
ULTIMATE ONE-HANDED OPERATION

Dual Output Tactical IR Flashlight

- 4 x CREE XP-G3 S3 LEDs + 4 x Luminus SST-10-IR LEDs
- 2,500 Lumens
- 279 Meters
- 7,000mW 940nm
- 1 x 18650, 2 x CR123/RCR123

3 output levels
LOW 1,000mW
MID 3,000mW
HIGH 7,000mW



Easy dual beam switching mechanism between IR and white beams



MT Multi-Task Series

Multi-Task flashlight series is a line of highly versatile and practical illumination tools designed for a multitude of users and environments. A sleek, robust body finely etched with extensive knurling and a perfect finish is a hallmark of this range, but even more important is the highly practical and usable user-interface which makes selecting modes a breeze. NITECORE MT series flashlights are your ultimate lighting tools for various environments.

MT1A Pro

High Output Compact Rechargeable AA Flashlight

- NiteLab UHI 25 LED
- 800 Lumens 250 Meters
- 1 × NITECORE NL1411R (1,100mAh) 14500 Li-ion Battery, 1 × AA



MT2A Pro

High Performance Rechargeable AA Flashlight


- NiteLab UHI 20 LED
- 1,000 Lumens 255 Meters
- 1 × NITECORE NL1416R (1,600mAh) 14100 Li-ion Battery, 2 × AA



MT1C Pro

High Output Compact Tactical Flashlight

- NiteLab UHI 20 LED
- 1,000 Lumens 360 Meters
- 1 × NITECORE NL1816R (1,600mAh) 18350 Li-ion Battery, 1 × CR123/RCR123



MT2C Pro

High Output Compact Tactical Flashlight

- NiteLab UHI 20 LED
- 1,800 Lumens 520 Meters
- 1 × NITECORE NL1836R (3,600mAh) 18650 Li-ion Battery, 2 × CR123/RCR123



MT06MD

Pocket Medical AAA Penlight

- Nichia 219B LED
- 180 Lumens 58 Meters
- 2 × AAA

Features



High CRI Output (CRI≥90)
Photobiologically Safe (RG0)



Medical



Default low mode setting

MT10C

Ultra Compact Tactical White + Red Flashlight

- CREE XM-L2 U2 LED
- 920 Lumens 190 Meters
- 1 × IMR18350, 1 × CR123/RCR123

MT10C ARC Rail Helmet Light Set

MT10C + LMA1



MT21C

Multifunctional 90° Adjustable Flashlight

- CREE XP-L HD V6 LED
- 1,000 Lumens 184 Meters
- 1 × 18650, 2 × CR123/RCR123



90° adjustable head

Single side switch



Industrial Workplace



EDC



Magnetic



NPL Weapon Light Series

The Weapon Light Series is designed with a standard Picatinny Rail Mount, available for quick mounting and compatible with firearms with universal Picatinny Rails. The Anti-impact Reverse Polarity Protection Mechanism specially designed for shooting sports ensures its performance and stability.

Headlamp

Flashlight

Power Solution

Mosquito Protection

Fan

Explore More



NPL25 GL

Green Laser Compact Tactical Light

- NiteLab UHI 25 LED
- 900 Lumens 216 Meters
- 520nm Green Laser
- Detachable 500mAh Li-ion Battery

* Laser products are available in some countries/regions, subject to local regulations.



NPL25

Compact Tactical Light

- NiteLab UHI 20 LED
- 900 Lumens 255 Meters
- Detachable 500mAh Li-ion Battery



NPL27

Compact Tactical Light

- 650 Lumens 410 Meters
- Detachable 500mAh Li-ion Battery



NEW NPL35

High-Output Long-Range Tactical Light

- 2,000 Lumens 412 Meters
- Detachable 1,900mAh Li-ion Battery
- STROBE Mode



Quick Release Battery



NEW PLC500

USB-C Dual-Slot Charger For PLB500 Battery Only

- USB-C Port
- 500mA*2 Dual Slots
- 71g / 2.50 oz





T Series

T Series is a collection of mini keychain lights designed for everyday carry. Small yet powerful, each light comes with powerful features in an extremely mini package. With a built-in Li-ion battery and a Micro-USB / USB-C port, it offers flexible charging options and ultimate convenience of use, making it the best EDC gadget that you will carry every day.

NEW TUP2



Intelligent Three Color Temperatures Keychain Light

- 4 × NiteLab MCT UHE LEDs
- 1,200 Lumens
- 125 Meters
- Built-in 1,300mAh Li-ion Battery
- USB-C Rechargeable



Dual-button Interface


Features

- + Level Preset Function
- + 2 Lockout Modes

3 Colors Available



Four LEDs
All with Three Color Temperatures

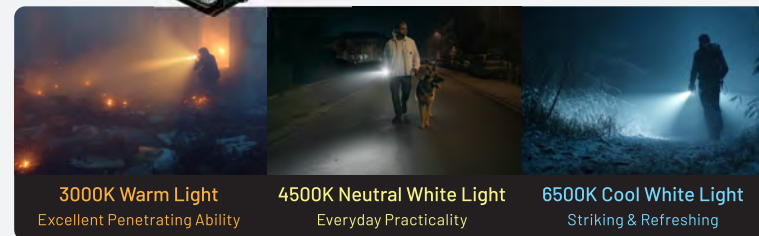

3000K Warm Light
Excellent Penetrating Ability

4500K Neutral White Light
Everyday Practicality

6500K Cool White Light
Striking & Refreshing

Multifunctional OLED Real-time Display



NEW TIP3



Multiple Color Temperatures Metallic Keychain Light

- NiteLab MCT UHE LEDs
- 720 Lumens
- 92 Meters
- Built-in 650mAh Li-ion Battery
- USB-C Rechargeable



Detachable Clip

Features

- + 2 Lockout Modes

3 Colors Available



TINI3 MCT

Intelligent Multiple Color Temperatures Keychain Light

- NiteLab MCT UHE LEDs
- 600 Lumens
- Built-in 330mAh Li-ion Battery
- USB-C Rechargeable
- 90 Meters

Features

- + 2m Impact Resistant
- + 2 Lockout Modes Available
- + Advanced Power Cut-Off (APC) Technology

3 Colors Available



Dual Buttons Design



Dual Lights

Both with Three Color Temperatures

3000K Warm Light
Excellent Penetrating Ability
Meeting the needs of walking in rainy or foggy days, escaping from fire and so on

4500K Neutral White Light
Everyday Practicality
Suitable for various daily activities like walking a dog, reading and emergency lighting

6500K Cool White Light
Striking & Refreshing
Ideal for nighttime walking and casual hiking

Multifunctional OLED Real-time Display



T4K

Quad-Core Intelligent Keychain Light

- 4 × CREE XP-L2 V6 LEDs
- 4,000 Lumens
- Built-in Li-ion Battery
- 209 Meters
- USB-C Rechargeable



HOT SALE

The TIKI Family



TIKI / TIKI LE



Mini Futuristic Keychain Lights	TIKI	TIKI GITD	TIKI GITD BLUE	TIKI LE	TIKI UV
Max Output	300 Lumens				1,000mW
Primary Emitter	OSRAM P8 LED				Luminus SST-10-UV LED
Auxiliary Emitters	High CRI White LED			Red LED	2 × High CRI White LEDs
	UV LED (500mW, 385nm)			Blue LED	
Built-in Li-ion Battery	✓	✓	✓	✓	✓
USB-C Rechargeability	✓	✓	✓	✓	✓
Glow In the Dark	✗			✗	✗

THUMB

Portable and Tiltable Work Light

- 2 × High Performance LEDs
- 85 Lumens
- Built-in Li-ion Battery
- 26 Meters
- USB-C Rechargeable



THUMB LEO

Portable and Tiltable Work Light
Law Enforcement Version

- 45 Lumens
- 500mW 385nm
- 24 Meters
- USB-C Rechargeable



TUBE V2.0

Tiny USB Keychain Light

- High Performance LED
- 55 Lumens
- Built-in Li-ion Battery
- USB-C Rechargeable
- 25 Meters



Multiple Colors Available





Lantern Series

NITECORE Lantern series products are professionally designed for camping. With a CRI rating >90, the lanterns emit a beam that is closer to natural daylight to avoid eye fatigue and reveal subtle details of objects. A single switch controls all brightness levels and modes, ideal for camping, excursion, working at night, night photography, everyday carry and so on.

LR40

Multifunctional USB-C Rechargeable Camping Lantern

- ☀️ 100 Lumens (360° Omnidirectional Illumination)
- 🔌 USB-C Rechargeable
- 🔌 USB-A Output
- 🕒 65 Hours
- 🔋 Built-in 4,000mAh Li-ion Battery

2 Colors Available




Features

Stepless Brightness Adjustment



3 Light Sources Available



Warm Light



White Light



Warm White Light

LR70

3-in-1 Rechargeable Lantern Flashlight


- 📷 2 × Luminus SST40 LEDs + 20 × High CRI LEDs
- ☀️ Flashlight Mode: 3,000 Lumens
Lantern Mode: 400 Lumens
- 🔋 10,000mAh Power Supply
- 🔌 USB-C Rechargeable



Lantern

Flashlight



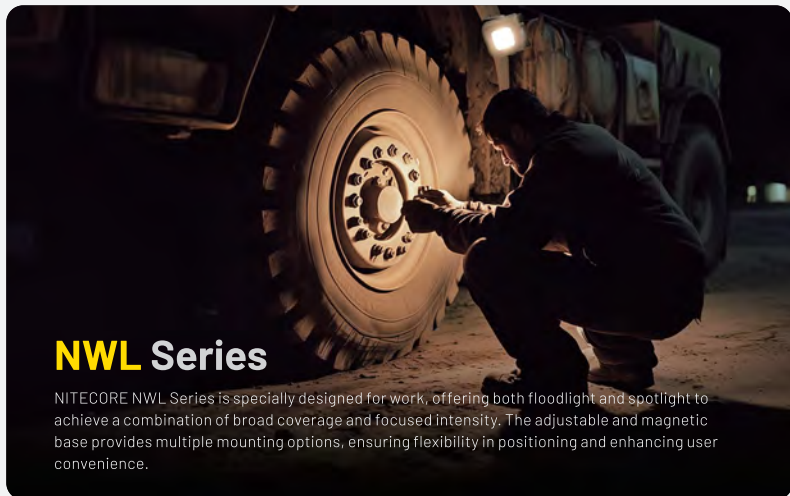

NWL Series

NITECORE NWL Series is specially designed for work, offering both floodlight and spotlight to achieve a combination of broad coverage and focused intensity. The adjustable and magnetic base provides multiple mounting options, ensuring flexibility in positioning and enhancing user convenience.

NWL20

Multifunctional Triple Output Work Light

Floodlight: 600 Lumens 43 Meters

Spotlight: 280 Lumens 83 Meters

Replaceable 21700 Li-ion Battery

USB-C Rechargeable



Multiple Mounting Options





0° - 180° Adjustable Base

NWL30

3-in-1 Outdoor Work Light

- 3,000 Lumens
- 120 Meters
- 130 Hours
- USB-C Rechargeable
- Built-in 18,000mAh Battery

Features

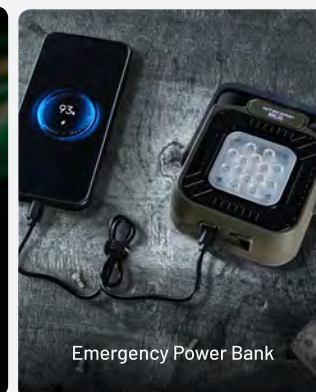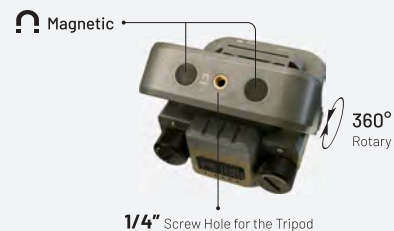

Headlamp

Flashlight

Power Solution

Mosquito Protection

Fan

Explore More

CL Series

The CL Series is a professional line of clip-on lights designed for law enforcement, security, and patrolling. These lights feature red/blue warning flashing to indicate identity, provide clear warnings and deterrence, and effectively ensure safety during night duty.




CL10

Multipurpose Ultra Lightweight Clip-on Light

- 45 Lumens
- 15 Meters
- 28 Hours
- 28g (0.99 oz)
- 2 x AAA



Features

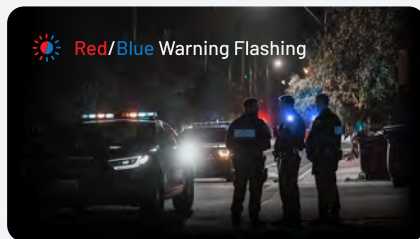


Red/Blue Warning Flashing

Approx.
180°
Adjustable




Versatile Clip



Chest



Shoulder



Cap brim

GEM Series

GEM series is professionally designed for gemstones identification, featuring high output and great penetrability. An innovative rotary switch for infinite brightness levels. Multiple light sources optional, making the series perfect for gemstones, jewelries and treasures inspection.

GEM8

Professional Gemstone Identification Light

- CREE XP-L HI V3 LED
- 500 Lumens
- 39 Meters
- 1 x 18650,
2 x CR123/RCR123



GEM10 UV

Professional Gemstone Identification UV Light

- UV LED
- 3000mW 365nm
- 1 x 18650,
2 x CR123/RCR123



DL Series

A flashlight for diving needs to be totally waterproof and reliable, with high output and flexibility. NITECORE DL Series is specially designed for underwater activities, offering multiple modes for underwater lighting.

DL30

Dive Light

- 1,100 Lumens
- 100 Meters Submersible
- 273g / 9.63 oz (in Air), 126g / 4.44 oz (Underwater)
- NITECORE NL2153R 21700 Li-ion Battery (5,300mAh)


Features

5 Flashing Frequencies:

SOS, QUICK FLASHING, FLASHING/1s, FLASHING/2s, FLASHING/3s



Power Solution

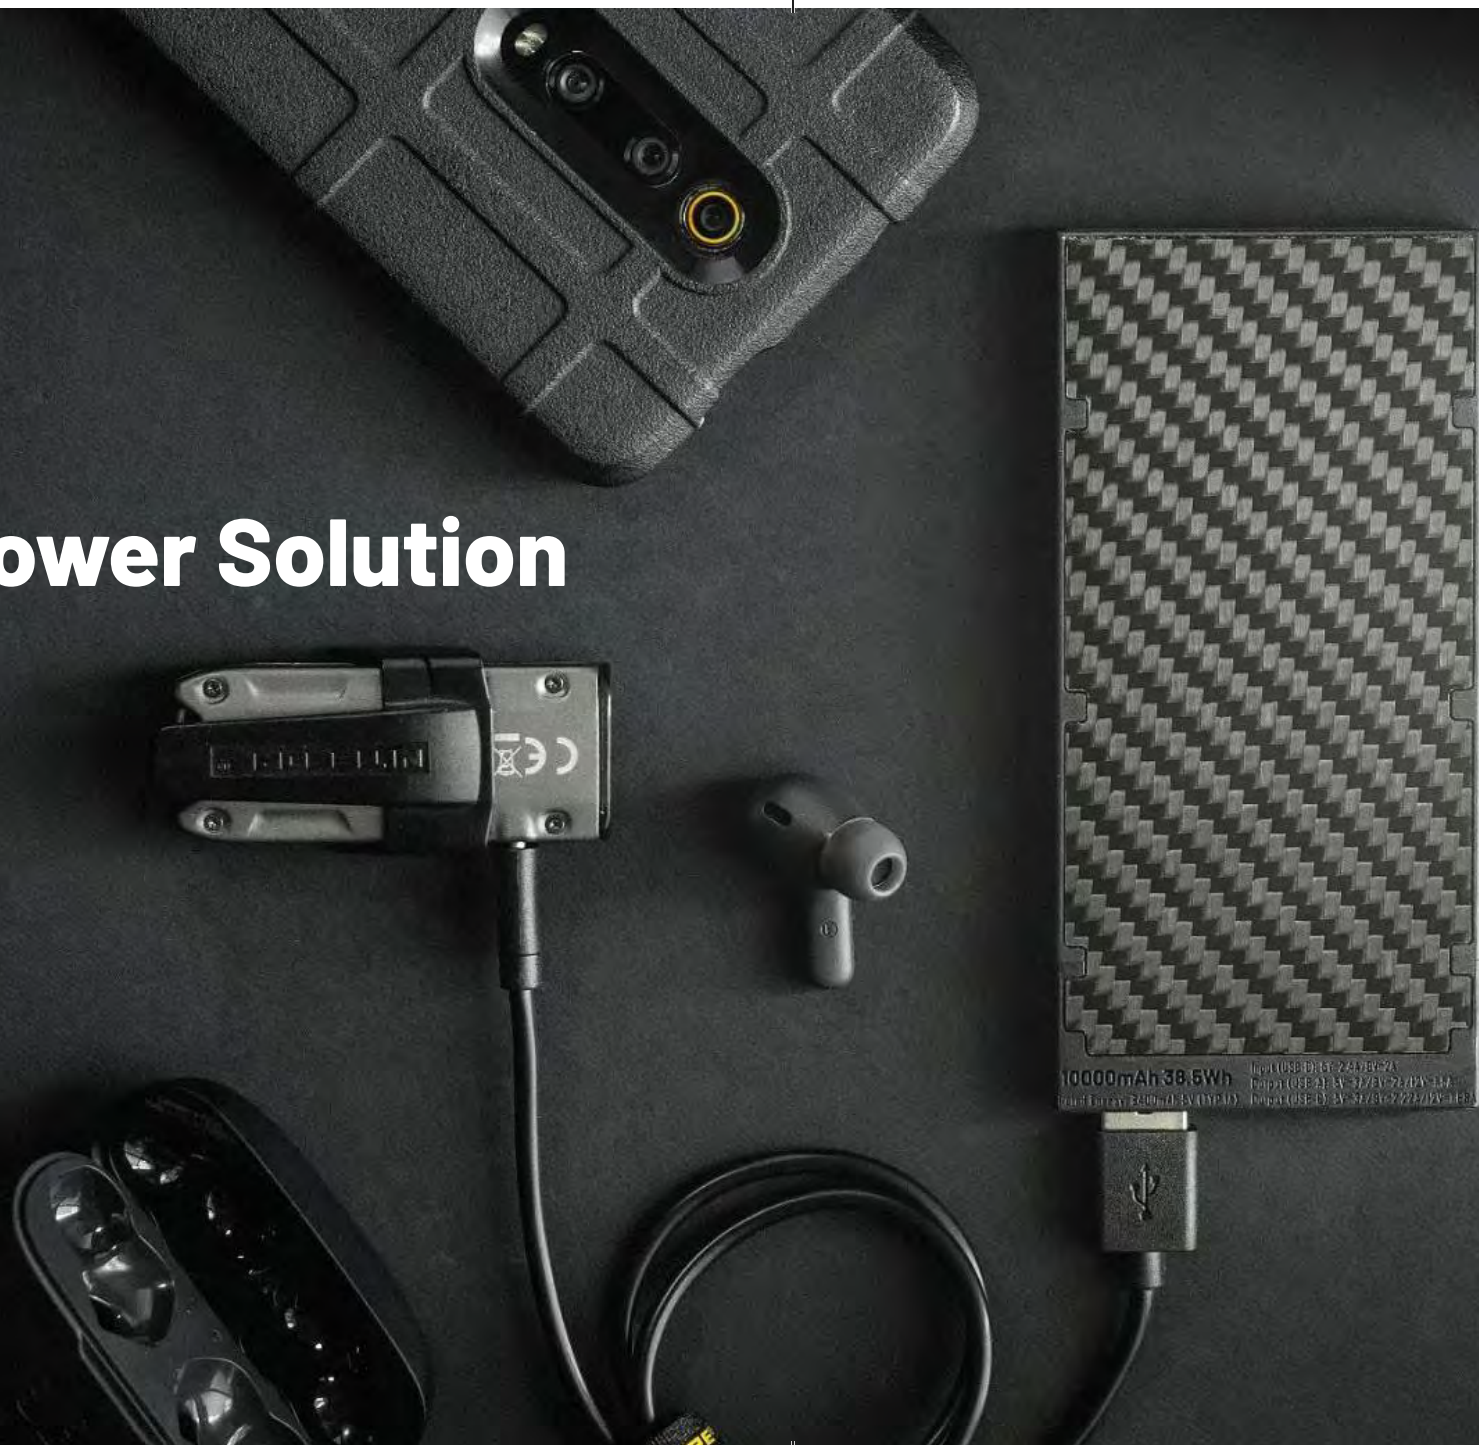

NB10000 Gen4

Ultra Lightweight Competition-Grade Power Bank


- 10,000mAh 3.9V (39Wh)
- 22.5W Max Input & Output
- 143g (5 oz)



Carbon Fiber Shell



Knock to Wake



Touch Button Dynamic RGB Light



NEW



NB10000 Gen4

	Ultra Lightweight Competition-Grade Power Bank	Ultra Lightweight Carbon Fiber Energy Brick
Capacity	10,000mAh 3.9V (39Wh)	10,000mAh 3.85V (38.5Wh)
Rated Energy	6,800mAh 5V (TYP 3A) / 7,200mAh 5V (TYP 1A)	6,400mAh 5V (TYP 1A)
Input	USB-C (IN): 5V-3A / 9V-2.22A / 12V-1.87A (22.5W MAX)	USB-C: 5V-2.4A / 9V-2A (18W MAX)
Output	USB-C (OUT1) / (OUT2): 5V-3A / 9V-2.22A / 12V-1.87A (22.5W MAX) Total Output: 5V-3A (15W MAX)	USB-C: 5V-3A / 9V-2.22A / 12V-1.68A (20W MAX) USB-A: 5V-3A / 9V-2A / 12V-1.5A (18W MAX) Dual Ports: 5V-3A (15W MAX)
Dimensions	116mm × 46.8mm × 14.5mm (4.57" × 1.84" × 0.57")	121.9mm × 59mm × 10.6mm (4.8" × 2.32" × 0.42")
Weight	143g±5g (5 oz±0.1 oz)	150g±5g (5.29 oz±0.1 oz)

HOT SALE



NB10000

NEW



NB Plus

	Waterproof Competition-Grade Energy Bar	Waterproof Competition-Grade Energy Bar
Capacity	10,000mAh 3.85V (38.5Wh)	5,000mAh 3.88V (19.4Wh)
Rated Energy	5,600mAh 5V (TYP 3A)	3,300mAh 5V (TYP 2.4A)
Input	USB-C: 5V-3A / 9V-2A (18W MAX)	USB-C: 5V-2.4A / 9V-2A (18W MAX)
Output	USB-C: 5V-3A / 9V-2.22A / 12V-1.68A / 10V-2.25A (22.5W MAX) USB-A: 5V-3A / 9V-2A / 12V-1.5A / 10V-2.25A (22.5W MAX) Total Output: 5V-3A (15W MAX)	USB-C: 5V-2.4A / 9V-2A / 12V-1.5A (18W MAX)
Dimensions	122.4mm × 59.6mm × 11.7mm (4.82" × 2.35" × 0.46")	112.0mm × 48mm × 9.7mm (4.41" × 1.89" × 0.38)
Weight	155g±5g (5.47 oz±0.1 oz)	89g±5g (3.14 oz±0.1 oz)



NB Air



NB20000 Gen3

	Ultra Lightweight Carbon Fiber Power Bank	Carbon Fiber Magnetic Wireless Power Bank
Capacity	20,000mAh 3.6V (72Wh)	5,000mAh 3.85V (19.25Wh)
Rated Energy	11,220mAh 5V (TYP 3A)	3,000mAh 5V (TYP 1A)
Input	USB-C (IN1) / (IN2): 5V-2A / 9V-2A (18W MAX)	USB-C: 5V-2.4A / 9V-2A / 12V-1.5A
Output	USB-C (OUT1) / (OUT2): 5V-3A / 9V-2.22A / 12V-1.68A / 10V-2.25A (22.5W MAX) Dual Ports: 5V-3A (15W MAX)	USB-C: 5V-2.4A / 9V-2.22A / 12V-1.67A Wireless: 5W / 7.5W / 10W / 15W
Dimensions	118.0mm × 69.0mm × 21.5mm (4.65" × 2.72" × 0.85")	67.2mm × 99.7mm × 10.6mm (2.65" × 3.93" × 0.42")
Weight	291g±5g (10.26 oz±0.1 oz)	120g±5g (4.23 oz±0.1 oz)



NW5000

NEW



CARBO 10000 Gen2

**Professional Outdoor
Fast-Charge Power Bank**

Capacity	10,000mAh 3.88V (38.8Wh)
Rated Energy	7,000mAh 5V (TYP 3A)
Input	USB-C (IN): 5V-2A / 9V-3A / 12V-2.5A (30W MAX)
Output	USB-C (OUT1) / (OUT2): 5V-3A / 9V-3A / 12V-2.5A / 15V-2A / 10V-2.25A (30W MAX) Total Output: 5V-3A (15W MAX)
Dimensions	126.5mm × 48.0mm × 15.8mm (4.98" × 1.89" × 0.62")
Weight	170g±5g (6.00 oz±0.1 oz)

NEW



CARBO 20

**Waterproof High Power
Carbon Fiber Power Bank**

Capacity	20,000mAh
Rated Energy	13,500mAh 5V (TYP 3A)
Input	USB-C (IN): 5V-3A / 9V-3A / 12V-3A / 15V-3A / 20V-3.25A (65W MAX)
Output	USB-C (OUT1) / (OUT2): 5V-3A / 9V-3A / 12V-3A / 15V-3A / 20V-3.25A (65W MAX) Total Output: 5V-3A (15W MAX)
Dimensions	128mm × 48mm × 29mm (5.04" × 1.89" × 1.14")
Weight	320g±5g (11.29 oz±0.1 oz)

NEW



POCKET 5

Built-in USB-C Cable Pocket Power Bank

Capacity	5,000mAh
Rated Energy	3,400mAh 5V (TYP 2.4A)
Input	USB-C (C1) / (C2): 5V-2.4A / 9V-2A (18W MAX)
Output	USB-C (C1) / (C2): 5V-2.4A / 9V-2.22A / 12V-1.67A / 10V-2.25A (22.5W MAX) Total Output: 5V-3A (15W MAX)
Dimensions	102mm × 70mm × 9mm (4.02" × 2.76" × 0.35")
Weight	125g±5g (4.41 oz±0.1 oz)



POCKET 10000

Carbon Fiber Pocket Power Bank

Capacity	10,000mAh 3.85V (38.5Wh)
Rated Energy	6,200mAh 5V (TYP 3A)
Input	UCB-C Cable: 5V-3A / 9V-2A / 12V-1.5A (18W MAX) USB-C Port: 5V-3A / 9V-2A / 12V-1.5A (18W MAX)
Output	UCB-C Cable: 5V-3A / 9V-2.22A / 12V-1.67A (20W MAX) USB-C Port: 5V-3A / 9V-2.22A / 12V-1.67A / 10V-2.25A (22.5W MAX) Total Output: 5V-3A (MAX)
Dimensions	105mm × 70mm × 12.5mm (4.13" × 2.76" × 0.49")
Weight	160g ±5g (5.64 oz±0.1 oz)

Operable at
-40°C
(-40°F)



SUMMIT 10000

**Low Temperature Resistant
Carbon Fiber Power Bank**

Capacity	10,000mAh 3.85V (38.5Wh)
Rated Energy	6,400mAh 5V (TYP 1A)
Input	USB-C: 5V-2.4A / 9V-2A
Output	USB-C: 5V-3A / 9V-2.22A / 12V-1.68A USB-A: 5V-3A / 9V-2A / 12V-1.5A Dual Ports: 5V-3A (MAX)
Dimensions	125.5mm × 63.5mm × 14.5mm (4.94" × 2.50" × 0.57")
Weight	175g±5g (6.17 oz±0.1 oz)

SUMMIT 20000

**Low Temperature Resistant
Carbon Fiber Power Bank**

Capacity	20,000mAh 3.85V (77Wh)
Rated Energy	13,500mAh 5V (TYP 2A)
Input	USB-C: 5V-2.4A / 9V-2A
Output	USB-C: 5V-3A / 9V-2.22A / 12V-1.68A USB-A: 5V-3A / 9V-2A / 12V-1.5A Dual Ports: 5V-3A (MAX)
Dimensions	124mm × 60mm × 21.8mm (4.88" × 2.36" × 0.86")
Weight	315g±5g (11.11 oz±0.1 oz)



▶ Rechargeable Li-ion Batteries



NITECORE rechargeable Li-ion batteries feature higher energy intensity, better power storage and longer runtime compared to other batteries, and environmental-friendly that can be recharged for over 500 times.

Model	Specification	Capacity
NL1410	14500	1000mAh
NL166	16340	650mAh
NL169	16340	950mAh
NL1823	18650	2300mAh
NL1834	18650	3400mAh
NL1836	18650	3600mAh
NL1840	18650	4000mAh
NL2150	21700	5000mAh
NL2155	21700	5500mAh
NL2160	21700	6000mAh

▶ USB-C Rechargeable Li-ion Batteries



With a built-in USB-C port, it is convenient to charge the rechargeable Li-ion batteries via a USB cable.

Model	Specification	Capacity
NL1411R	14500	1100mAh
NL169R	16340	950mAh
NL1816R	18350	1600mAh
NL1834R	18650	3400mAh
NL1836R	18650	3600mAh
NL2150RX	21700	5000mAh
NL2155HPR	21700	5500mAh

▶ High Performance Batteries



Specially designed for high performance products, it features high discharge current and excellent output with resistance to extreme conditions, capable of driving your devices to the best performance.


Model	Specification	Capacity	Discharge Current
NL1836HP	18650	3600mAh	8A
NL1840HP	18650	4000mAh	10A
NL2155HP	21700	5500mAh	20A
NL2155HPR	21700	5500mAh	20A
NL2160HP	21700	6000mAh	20A

▶ USB-C Rechargeable Li-ion AA Battery



Model	NH2400
Rated Capacity	2400mAh
Rated Energy	3600mWh
Nominal Voltage	1.5V
Input	USB-C: 5V-0.5A
Feature	USB-C Rechargeable

Power Your Devices



21700 Intelligent Battery System



21700 i Series Battery

NL2150HPi
NL2155HPi
NL2160HPi

ML21 Magnetic Light

Brightness	80 Lumens
CRI	≥ 90
Color Temperature	4000-4500K
Runtime	19h (NL2150HPi)
Beam Diameter	12m
Peak Beam Intensity	9cd

MPB21 Magnetic Power Bank

Input	5V - 2A (MAX)
Output Voltage	4.2V±1% (Battery)
Output Current	5V±5% (USB)
Output Current	2A (MAX)

▶ 21700 i Series Battery



Model	Specification	Capacity	Discharge Current
NL2150HPi	21700	5000mAh	15A
NL2155HPi	21700	5500mAh	20A
NL2160HPi	21700	6000mAh	20A

As a patent product developed by NITECORE, the 21700 i Series Battery is a proprietary 21700 rechargeable Li-ion battery featuring dual way output with positive and negative polarities at both ends and a high energy density.



Charger



UI1




1 BATTERY SLOT

Portable USB-C Battery Charger

UI1 SPEC

Compatible with	IMR / Li-Ion
Input	DC 5V/1A 5W
Output voltage	4.2V±1%
Output current	1,000mA(MAX)



UI2



2 BATTERY SLOTS

Portable Dual-Slot USB-C Battery Charger

UI2 SPEC

Compatible with	IMR / Li-Ion
Input	DC 5V/2A 10W
Output voltage	4.2V±1%
Output current	1,000mA*2(MAX)

UI1 & UI2

Compatible with

IMR/Li-Ion: 10340, 10350, 10440, 10500, 12340, 12500, 12650, 13450, 13500, 13650, 14430, 14500, 14650, 16500, 16340(RCR123), 16650, 17350, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 20700, 21700, 22500, 22650, 25500, 26500, 26650



UM2



2 BATTERY SLOTS

UM2 SPEC

Compatible with	IMR / Li-Ion / LiFePO4 / Ni-MH / Ni-Cd
Input	DC 5V/2A 9V/2A 18W(MAX)
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	QC Mode: 1,500mA*2(MAX) Standard Mode: 1,000mA*2(MAX)



UM4



4 BATTERY SLOTS

UM4 SPEC

Compatible with	IMR / Li-Ion / LiFePO4 / Ni-MH / Ni-Cd
Input	DC 5V/2A 9V/2A 18W(MAX)
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	QC Mode: 1,500mA*1(MAX), 1,500mA*2(MAX), 750mA*4(MAX) Standard Mode: 1,500mA*1(MAX), 1,000mA*2(MAX), 500mA*4(MAX)

UM2 & UM4 Compatible with

IMR/Li-Ion/LiFePO4: 10440, 14500, 14650, 16500, 16340(RCR123), 16650, 17350, 17500, 17650, 17670, 17700, 18350, 18490, 18500, 18650, 18700, 20700, 21700, 22500, 22650, 25500, 26500, 26650, 26700
Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D

UMS2



2 BATTERY SLOTS

UMS2 SPEC

Compatible with	IMR / Li-Ion / LiFePO4 / Ni-MH / Ni-Cd
Input	DC 5V/2A 9V/2A 18W(MAX)
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	QC Mode: 3,000mA*1(MAX), 2,000mA*2(MAX), Standard Mode: 2,000mA*1(MAX), 1,000mA*2(MAX)



UMS4



4 BATTERY SLOTS

UMS4 SPEC

Compatible with	IMR / Li-Ion / LiFePO4 / Ni-MH / Ni-Cd
Input	DC 5V/2A 12V/1.5A 18W(MAX)
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	QC Mode: 3,000mA*1(MAX), 2,000mA*2(MAX), 1,000mA*4(MAX) Standard Mode: 2,000mA*1(MAX), 1,000mA*2(MAX), 500mA*4(MAX)



UMS4 Compatible with

IMR/Li-Ion/LiFePO4: 10440, 14500, 14650, 16500, 16340(RCR123), 16650, 17350, 17500, 17650, 17670, 17700, 18350, 18490, 18500, 18650, 18700, 20700, 21700, 22500, 22650, 25500, 26500, 26650, 26700
Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D



SC4

4 BATTERY SLOTS

Four-Slot Superb Charger

SC4 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 1A(MAX) 40W DC 12V 3A
Output voltage	Battery: 4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1% USB: 5V±5% 2.1A MAX
Output current	3A*2 (MAX) 1.5A*4

SC4 Compatible with

Li-ion/IMR/LiFePO4: 10440, 10500, 12340, 12500, 12650, 13450, 13500, 13650, 14350, 14430, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 22500, 22650, 25500, 26500, 26650
Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D

NEW i2

2 BATTERY SLOTS

Dual-Slot Intellicharger

NEW i2 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 0.25A(MAX)8W DC 9-12V
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	500mA × 2 / 1,000mA × 1



NEW i4

4 BATTERY SLOTS

Four-Slot Intellicharger

NEW i4 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 0.25A(MAX)10W DC 9-12V 1A
Output voltage	4.35V±1% / 4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	1.5A × 1 / 0.75A × 2 / 0.5A × 2 / 0.375A × 4



NEW i2 & NEW i4 Compatible with

Li-ion/IMR/LiFePO4: 10340, 10350, 10440, 10500, 12340, 12500, 12650, 13450, 13500, 13650, 14350, 14430, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 18350, 18490, 18500, 18650, 22500, 22650, 25500, 26500, 26650
Flat-topped Batteries: 18700, 20700, 21700
Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D

Ci2

USB-C

2 BATTERY SLOTS

Intelligent USB-C Dual-Slot Superb Charger

Ci2 SPEC	
Compatible with	IMR / Li-ion / Ni-MH / Ni-Cd
Input	5V-2A / 9V-2A / 12V-1.5A 18W(MAX)
Output voltage	4.2V±1% / 1.48V±1%
Output current	Fast Charge Mode: 3,000mA*1 MAX / 1,500mA*2 MAX Standard Mode: 2,000mA*1 MAX / 1,000mA*2 MAX



Ci4

USB-C

4 BATTERY SLOTS

Intelligent USB-C Four-Slot Superb Charger

Ci4 SPEC	
Compatible with	IMR / Li-ion / Ni-MH / Ni-Cd
Input	5V-2A / 9V-2A / 12V-1.5A 18W(MAX)
Output voltage	4.2V±1% / 1.48V±1%
Output current	Fast Charge Mode: 3,000mA*1 MAX / 1,500mA*2 MAX / 1,000mA*3 MAX / 750mA*4 MAX Standard Mode: 2,000mA*1 MAX / 1,000mA*2 MAX / 700mA*3 MAX / 500mA*4 MAX



Ci2 & Ci4 Compatible with

IMR/Li-ion: 10440, 14500, 14650, 16500, 16340 (RCR123), 16650, 17350, 17500, 17650, 17670, 17700, 18350, 18490, 18500, 18650, 18700, 21700, 22500, 22650, 25500, 26500, 26650, 26700
Ni-MH/Ni-Cd: AA, AAA, AAAA, C, D

D2

Dual-Slot Digicharger

2 BATTERY SLOTS

D2 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 0.25A(MAX) DC 12V 1A
Output voltage	4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	500mA × 2



D2 & D4 Compatible with

Li-ion / IMR / LiFePO4: 26650, 22650, 18650, 17670, 18490, 18350, 17500, 14500, 16340 (RCR123), 10440
Ni-MH/Ni-Cd: AA, AAA, AAAA, C

D4

Four-Slot Digicharger

4 BATTERY SLOTS

D4 SPEC	
Compatible with	IMR / Li-ion / LiFePO4 / Ni-MH / Ni-Cd
Input	AC 100-240V 50/60Hz 0.35A(MAX) DC 12V 1A
Output voltage	4.2V±1% / 3.7V±1% / 1.48V±1%
Output current	375mA × 4 / 750mA × 2



Mosquito Protection

EMR Series

With the innovative heating system and safe activating method, the NITECORE EMR Series is specially designed for outdoor enthusiasts to repel mosquitoes or pests effectively. The EMR Series products are powered by the rechargeable Li-ion battery, minimizing the carbon footprint while providing users with a long-lasting protection zone.



EMR Series



Electronic Repeller

Can be recharged at any time for long-term use while it is safe, green, and efficient



Conventional Repeller



Fuel Powered

There is a need to carry and replace fuel, which is high consumption, not eco-friendly, and unapproved by airlines.



FCB 3.0 Heating System

(Utility Model Patent No. ZL2022225158067)

Peak Heating Area Temperature:
Approx. 180°C / 356°F

Heating Circuit

Fiberglass

Lower Heat Loss
Upward Heat Conduction

Ultrasonic Function

40kHz

Ideal for repelling pests, such mice, snakes, cockroaches, and skunks.

16ft MAX Protection Zone

Note: The data may vary due to different products.

Professional Outdoor Mosquito Repellent Mat

Effective & Fast-Acting
Each Lasting 6 Hours

EMR25

Multipurpose Portable Electronic Repeller

Dimensions: 165.4mm x 56.2mm x 41.9mm (6.51" x 2.21" x 1.65")
 Weight: 295g±5g (10.41 oz±0.1 oz)

Features



12000mAh

Replaceable Battery Cartridge

- Backup Power Bank
- USB-C Two-Way Fast Charging



Professional Outdoor Mosquito Repellent Mat

Effective Fast-Acting



MRM10

30 pcs / box



MRM10 mini

60 pcs / 30 pcs per box

1 Mat



6 Hours



	EMR06 TAC	EMR15	EMR16
Electronic Mosquito Repeller	✓	✓	✓
Max Protection Zone	16ft	16ft	16ft
Ultrasonic Function	✗	✗	✗
Battery Capacity	1,800mAh	✗	5,200mAh
Max Runtime	3.5h	✗	5h
Power Supply	✗	✗	✗
OLED Display	✗	✗	✗
Weight	98g (3.46 oz)	62g (2.19 oz)	180g (6.35 oz)



	EMR23	EMR25	EMR30 SE	EMR40
Electronic Mosquito Repeller	✓	✓	✓	✓
Max Protection Zone	16ft	16ft	16ft	16ft
Ultrasonic Function	✗	✓	✗	✗
Battery Capacity	8,000mAh	12,000mAh	✗	7,800mAh
Max Runtime	8h	12h	✗	10h
Power Supply	✓	✓	✗	✗
OLED Display	✓	✓	✗	✗
Weight	247g (8.71 oz)	295g (10.41 oz)	86g (3.03 oz)	229g (8.08 oz)

Headlamp

Flashlight

Power Solution

Mosquito Protection

Fan

Explore More

NEF Series

NEW NEF01

Mini High-Speed Handheld Fan

Dimensions: 110.0mm × 50.8mm × 31.0mm
(4.33" × 2.00" × 1.22")

Weight: 166g / 5.86 oz

NEF01 SPEC	
Capacity	4,000mAh
Input	5V-2A
Rated Power	7W (MAX)
Rotational Speed	36,000 RPM (MAX)
Wind Speed	11m/s (25 mph) (MAX)



Cobalt Blue Metallic Gray

2 Colors Available ● ●



NEF03 Pro

Foldable Handheld Fan

Dimensions: 192.0mm × 90.0mm × 40.0mm
(7.56" × 3.54" × 1.57")



Weight: 222g / 7.83 oz

NEF03 Pro SPEC	
Capacity	4,000mAh
Input	5V-2A
Rated Power	5W (MAX)
Rotational Speed	5,000 RPM (MAX)
Wind Speed	5.8m/s (13 mph) (MAX)



2 Colors Available ○ ●

- + 13h Max Runtime
- + LED Real-time Display



NEF10

Multifunctional Electric Fan

Dimensions: 194mm × 175mm × 345mm
(7.6" × 6.9" × 13.6")


Height: 345mm / 13.6" (MAX)
275mm / 10.8" (MIN)

Weight: 655g (±5g) / 23.10 oz (±0.18 oz)

NEF10 SPEC	
Capacity	10,000mAh
Rated Input	5V-2A
Input Power	5V-2A
Rated Power	4W (MAX)
Output Power	5V-2A



2 Colors Available ○ ●



NEF20

Portable Bladeless Neck Fan

Dimensions: 219.7mm × 202.7mm × 63mm
(8.65" × 7.98" × 2.48")

Weight: 304g±5g / 10.72 oz±0.1 oz

+ 360° Air Supply Angle

+ 170 L/min Max Airflow Rate

NEF20 SPEC	
Capacity	4,000mAh
Rated Input	5V-2A
Rated Power	4W MAX
Rotational Speed	3,900 RPM



izzCool® Series

Handheld Air Conditioner Fan

-16°C

Portable Air Conditioner Fan

Feel the Cool in Your Hand

NEW




2 Colors Available
○ Matte White
○ Mint Green



NEW

2 Colors Available
○ Pearl White
○ Mint Green


	izzCool® 20	izzCool® 20 Pro
Capacity	2,000mAh	5,000mAh
Rated Input	5V-2A	5V-2A / 9V-2A / 12V-1.5A (18W MAX)
Rated Power	7W (MAX)	7W (MAX)
Charging Time	1.5h (5V/2A Adapter)	1h 50min (12V/1.5A Adapter)
Moisture Output	72 mL/h	72 mL/h
Rotational Speed	13,000 RPM (MAX)	13,000 RPM (MAX)
Wind Speed	8.6m/s (19 mph) (MAX)	8.6m/s (19 mph) (MAX)
Runtime of Cool Mist Mode	Level 4 (MAX) 1.2h Level 3 2h Level 2 5.5h Level 1 (MIN) 9.5h	Level 100 (MAX) 2.6h Level 1 (MIN) 44h
Dimensions	158.7mm × 62.0mm × 54.3mm / 6.25" × 2.44" × 2.14"	158.7mm × 62.0mm × 54.3mm / 6.25" × 2.44" × 2.14"
Weight	162g / 5.71 oz (Accessory Not Included)	189g / 6.67 oz (Accessory Not Included)
Accessories	Lanyard	Lanyard



2 Colors Available
○ Cloud White
○ Glacier Blue

NEW

	izzCool® 30	izzCool® 40
Capacity	3,500mAh	5,200mAh
Rated Input	5V-2A	18W (MAX)
Rated Power	5W (MAX)	5W
Charging Time	2h 30min (5V/2A Adapter)	2h (18W Fast Charging)
Moisture Output	50 mL/h	50 mL/h
Rotational Speed	5,000 RPM (MAX)	36,000 RPM (MAX)
Wind Speed	5.8m/s (13 mph) (MAX)	9.8m/s (22 mph) (MAX)
Runtime of Cool Mist Mode	Level 5 (MAX) 2h Level 4 3h Level 3 5h Level 2 7h Level 1 (MIN) 10h	Level 5 (MAX) 3.5h Level 4 4.5h Level 3 5.5h Level 2 7h Level 1 (MIN) 14h
Dimensions	207.0mm × 90.0mm × 40.0mm / 8.15" × 3.54" × 1.57" (Accessory Not Included)	146.7mm × 67.9mm × 47.3mm / 5.78" × 2.67" × 1.88" (Accessory Not Included)
Weight	232g / 8.18 oz (Accessory Not Included)	240g / 8.47 oz (Accessory Not Included)

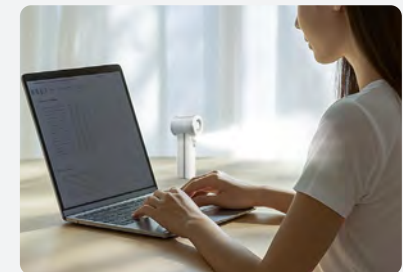

Headlamp
Flashlight
Power Solution
Mosquito Protection
Fan
Explore More

CW Series

CineWind®



red dot



CW30 Wireless Remote Control

Portable Remote-Controlled Photography Fan

50 km/h (31.1 mph)
Max Wind Speed



Wireless Remote Control



NP-F Batteries



USB-C Port

Dual Power Options



10-Level Control Knob



Multiple Mounting Interfaces



Detachable Fan Covers for Easy Cleaning



NIA009
Portable Concentrator



Headlamp

Flashlight

Power-Solution

Mosquito Protection

Fan

Explore More

Air Pump

NEW APO5C

Ultra Lightweight Carbon Fiber Air Pump

APO5C SPEC

Inflation / Deflation Pressure	±2.7 kPa
Airflow Rate	200 L/min
Runtime	45min
Dimensions	77.2mm × Φ26.0mm / 3.04" × Φ1.02" (Accessories Not Included)
Weight	23g±1g / 0.81 oz±0.04 oz (Accessories and Battery Not Included)
Accessories Included	Storage Bag, Nozzle × 4, Adapter



Carbon Fiber Body



Gadget

Bite Healer 10

For instant relief from mosquito bite itching

- Tiny and Portable
- Chemical Free
- Approx. **100** Applications per Full Charge

Fast Itch Relief
3s (MIN)

Long-lasting Itch Relief
6s (MAX)

NLink10

USB-C Magnetic Fast Charging Cable



- Magnetic Storage
- 60W Fast Charging
- Lightweight & Skin-Friendly



Flexible USB Stand
USB-C to USB-C



Flexible USB Stand
USB-A to USB-C




UAC20
Nylon Braided USB-C Charging Cable

Titanium / Aluminum Collection



▶ **NTP31**

Aluminum Alloy
Bolt Action Tactical Pen



▶ **NTP30**

Titanium Alloy
Bolt Action Tactical Pen



▶ **Halo 10**

Titanium Curve Measure Ring



▶ **NTK09**

Titanium Utility EDC Knife



▶ **NSH10**

Titanium Alloy Multiuse Snap Hook



▶ **NTK05**

Titanium Alloy Keychain Knife



▶ **NWS10**

Emergency Whistle



FSP30

Unfolded Dimensions	295mm × 880mm × 4mm (11.61" × 34.65" × 0.16")
Folded Dimensions	295mm × 170mm × 45mm (11.61" × 6.69" × 1.77")
Weight	625g±5g (1.38 lbs±0.01 lbs)
Panel Number	4
Cell Efficiency	24%
Total Output Power	30W (MAX)
Output Port	USB-A × 2, USB-C
USB-A Output	Total 5V-3.1A
USB-C Output	5V-3A / 9V-2A



Extension Cable for Solar Panels
10m (33ft)



Parallel Cable for Solar Panels
5m (16ft)



Lighting Accessories

► Gun Mounts



	GM02 Pro	GM02MH	GM05
Type	Picatinny Rail Mount	Magnetic Mount	Generic Scope Mount
Compatible Tube Diameter	1" (25.4mm-26.5mm)	1" (25.4mm)	1"-1.2" (25.4mm-30mm)

► Tactical Remote Switch



RSW1 Pro
Compatible Models:
MH12 Pro, MH25 Pro,
MH40 Pro

► Interchangeable Tail Cap



NTC2i
Type: 21700 U-shaped Tailcap Switch
Button: Power Button + Mode Button
Compatible Model: P10i, P30i, P10iX,
P20iX, and more

► Tactical Holsters



	NTH10	NTH20	NTH25	NCP30
Type	Quick Draw Tactical Holster	Quick Draw Tactical Holster	Quick Draw Tactical Holster	Durable Multifunctional Tactical Holster
Compatible Model	P10i, P10iX	P20iX, P20i UV	P23i, P20iX, P20i UV	P20iX, P20i UV, P23i



Bike Mount

BM06



Helmet Clip

NHC10



Shoulder Clip

NSC10



Window Breaker

NWB10



Silicone Grease

SG7



Tactical Lanyard

NTL10



Tactical Lanyard

NTL20

► Filters




Utilized a toughened ultra-clear glass lens with anti-reflective coating that provides impact resistance and maximum light penetrability. Flashlights equipped with the red/green/blue filters to deliver soft red/green/blue light, suitable for short range reading.

Model	Compatible Size	Color
NFR20 / NFG20	19.7mm	RGB
NFR23 / NFG23 / NFB23	22.5mm	RGB
NFR25 / NFG25 / NFB25	25.4mm	RGB
NFR26 / NFG26 / NFB26	26.8mm	RGB
NFR32	32mm	R
NFR34 / NFG34 / NFB34	34mm	RGB
NFR40 / NFG40 / NFB40	40mm	RGB
NFR50 / NFG50	50mm	RG
NFR60 / NFG60 / NFB60	60mm	RGB
NFR65 / NFG65	65mm	RG
NFR70 / NFG70	70mm	RG
NFD23	22.5mm	White
NFD25	25.4mm	White
NFD34	34mm	White
NFD40	40mm	White
NFD60	60mm	White

► Traffic Wands

Made from PC material that features crush, wear and high temperature resistance, traffic wand can turn flashlights into an orange traffic wand for traffic control, road guide and distress signal.



Model	Compatible Size
NTW20	19.7mm
NTW25	25.4mm
NTW26	26.8mm
NTW32	32mm
NTW34	34mm
NTW40	40mm

Photography Accessories



BB2

Electronic Photography Blower

- Max Wind Speed of 80 km/h (49.7 mph)
- Magnetic Quick Release Brush
- 2.7 kPa Dust Removal Wind Pressure
- Lighting Function
- Mode Dial
- 33.6W High Power Motor
- 7.2Wh Li-ion Battery
- High Density Filter
- SILENT SILENT Mode
- USB-C Rechargeable




BB2 SPEC

Input	5V=2A
Rated Power	33.6W
Battery Capacity	7.2Wh
Rotational Speed	30,000 RPM
Wind Speed	TURBO: 80 km/h (49.7 mph)
	OPTICAL: 55 km/h (34.2 mph)
	SILENT: 30 km/h (18.6 mph)




NIA002 Camera Body Cleaning Brush

Compatible with: BB2, BB21, BB Mini



NIA003 Lens Cleaning Brush

Compatible with: BB2, BB21, BB Mini



NIA004 Multipurpose Cleaning Kit

Best Cleaning Partners

Compatible with: BB2, BB21



Extended Dusting Brush



Crevice Nozzle



Extended Nozzle With Brush





BB21

Electronic Photography Blower

- Max Wind Speed of 80 km/h (49.7 mph)
- 7.2Wh Li-ion Battery
- Durable PC Material
- Mode Indicators & Power Indicators
- Lockout Function
- Magnetic Quick Release Brush
- High Density Filter
- USB-C Rechargeable



BB21 SPEC

Input	5V-2A
Rated Power	33.6W
Battery Capacity	7.2Wh
Rotational Speed	30,000 RPM
Wind Speed	TURBO: 80 km/h (49.7 mph)
	OPTICAL: 55 km/h (34.2 mph)
	SILENT: 30 km/h (18.6 mph)

HOT SALE BB nano

Portable Versatile Electronic Blower

- Max Wind Speed of 40 km/h (24.9 mph)
- 2.6 kPa Dust Removal Wind Pressure
- 4.8Wh Li-ion Battery
- High Density Filter
- Silicone Nozzle Design
- USB-C Rechargeable



NIA006
High Density Filter

BB nano SPEC

Input	5V-2A
Rated Power	30W
Battery Capacity	4.8Wh
Rotational Speed	40,000 RPM
Wind Speed	HIGH: 40 km/h (24.9 mph)
	LOW: 15 km/h (9.3 mph)



NIA007
Vacuum Attachment Kit



NIA008
Enhanced Cleaning Kit

Sensor Cleaning Swab Series



reddot winner 2022



Mini Swabs
For Mirrorless Cameras

NC-CK12S
M4/3

NC-CK34S
Medium Format



NEW BAP10

NP-F Battery Adapter Plate

83g / 2.93 oz



Features

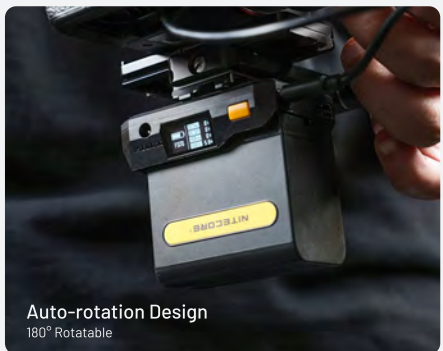

Camera Batteries and Chargers




	UFZ100	NP-F970	NP-F750
Compatible Brand	SONY	SONY	SONY
Voltage	7.2V	7.2V	7.4V
Capacity	2,250mAh	7,800mAh	5,200mAh
Energy	16.2Wh	56.16Wh	38.5Wh



USN3 PRO

USN4 PRO

Type	Dual Slot USB-C QC Charger for SONY	Dual Slot USB-C QC Charger for SONY
Battery Slot	2	2
Charging Port	USB-C	USB-C
Input	DC 5V/2A or 9V/2A	DC 5V/2A or 9V/2A
Output Voltage	Slot 1 8.4V±1% Slot 2 8.4V±1%	Slot 1 8.4V±1% Slot 2 8.4V±1%
Output Current	QC Mode: 1,200mA*1(MAX), 800mA*2(MAX) Standard Mode: 1,000mA*1(MAX)	QC Mode: 1,200mA*1(MAX), 800mA*2(MAX) Standard Mode: 1,000mA*1(MAX)
Compatible With	NP-FM500H / NP-F730 / NP-F750 / NP-F770 / NP-F970 / NP-F550	NP-FZ100



USN1

UCN2 PRO

Type	USB Dual Slot Travel Charger for SONY Camera	Dual Slot USB QC Charger for CANON
Battery Slot	2	2
Charging Port	Micro USB	Micro USB
Input	DC 5V/2A	DC 5V/2A or 9V/2A
Output Voltage	Slot 1 8.4V±1% Slot 2 8.4V±1%	Slot 1 8.4V±1% Slot 2 8.4V±1%
Output Current	1,000mA(MAX)	QC Mode: 1,200mA*1(MAX), 800mA*2(MAX) Standard Mode: 1,000mA*1(MAX)
Compatible With	NP-FW50	LP-E6N, LP-E6P



FX3

FX1

Type	Dual Slot USB QC Charger for FUJIFILM	Dual Slot USB Charger for FUJIFILM
Battery Slot	2	2
Charging Port	USB-C	Micro USB
Input	DC 5V/2A or 9V/2A	DC 5V/2A
Output Voltage	Slot 1 8.4V±1% Slot 2 8.4V±1%	Slot 1 8.4V±1% Slot 2 8.4V±1%
Output Current	QC Mode: 1,500mA*1(MAX), 1,000mA*2(MAX) Standard Mode: 1,000mA*1(MAX), 500mA*2(MAX)	1,000mA (MAX)
Compatible With	NP-W235	NP-W126 / NP-W126S



UNK2

ULSL

Type	Dual Slot USB Charger for NIKON	USB Travel Charger for LEICA Camera
Battery Slot	2	1
Charging Port	Micro USB	Micro USB
Input	DC 5V/2A	DC 5V/2A
Output Voltage	Slot 1 8.4V±1% Slot 2 8.4V±1%	Slot 8.4V±1%
Output Current	1,000mA (MAX)	1,000mA (MAX)
Compatible With	EN-EL15 / EN-EL15a / EN-EL15b	BP-SCL4




Stick-it Wrapper

Model: NC-ACC002



- Multifunctional Organizations
- Dust and Moisture Proof
- Scratch Resistant
- Environmentally Friendly

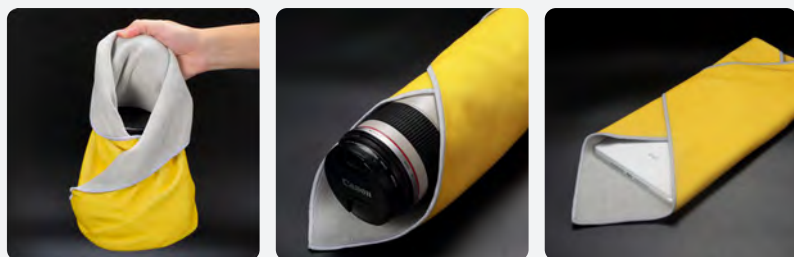

TIPA World Awards 2021
Best Power Accessory

SCL10 2-in-1 Smart Camera Light & Power Bank

SCL10 SPEC

Color Temperature	2,500K-6,300K
Max Brightness Output	800 Lumens
Capacity	10,000mAh 3.85V (38.5Wh)
Input	USB-C: 5V-2.4A / 9V-2A 18W (MAX)
Output	USB-C: 5V-2.4A / 9V-2A / 12V-1.5A USB-A: 5V-2.4A / 9V-2A / 12V-1.5A 18W (MAX) Dual Ports: 5V-2.4A (MAX)



2,500K



4,400K



6,300K



LHH82

Lens Heater



LHH82 SPEC

Input	5V-2A (MAX)
Input Port	USB-C
Operating Temperature	-40°C-40°C (-40°F-104°F)
Heating Temperature	45±5°C (113±9°F)
Compatible with	A filter size of 72-82mm

Carry Gear

► BP Series

BP23 Pro

Multipurpose Commuting Backpack

Capacity: 23L / 1,404 cu in

Dimensions: 47cm x 29cm x 15cm / 18.5" x 11.4" x 5.9"

Weight: 1,260g / 2.8 lbs

Features

23L (1,404 cu in) Large Capacity
With 4 Compartments

Top Compartment

Loop Surface

Main Compartment

Front Compartment

Outer Compartment

MOLLE System



500D CORDURA® Nylon Fabric



3D Carrying System



Internal Fiberglass Stay

BP23

Multipurpose Commuting Backpack

Weight: 1,030g / 2.3 lbs

Wearproof 600D Polyester Fabric



High-visibility Orange Interior Lining
Multifunctional Main Compartment



1 Laptop Compartment



6 Dual Internal Side Pockets



7 Mesh Zippered Pocket in the Front

► SLB Series



SLB01

Outdoor Sling Bag

Capacity: 1L / 61 cu in

Dimensions: 23.5cm x 17cm / 9.3" x 6.7"

Weight: 150g / 0.3 lbs

Clear Window

Triple Seal Protection

SLB03

SLING BAG

Capacity: 1.6L (98 cu in)

Dimensions: 26cm x 12.5cm x 5cm /

10.2" x 4.9" x 2.0"

Weight: 220g / 0.5 lbs



High Strength 500D
Nylon Fabric

Wearproof
Ultra Lightweight
Water and Dirt Resistant



Multiple Carry Modes



Sling Bag



Crossbody Bag



Waist Pack

NITCORE x Lii Gear



Designed in Collaboration
with Lii Gear


SLB05

Modular Commuting Sling Bag

Capacity: 2L / 122 cu in

Dimensions: 22cm x 5cm x 16cm / 8.7" x 2.0" x 6.3"

Weight: 275g / 0.6 lbs



The flap and the frontal pockets designed with 600D Nylon fabric with water resistant coating
500D high quality Nylon material with excellent resistance to fouling, wear, and splashes

Premium Material



Two-way YKK Zippers



UTX Duraflex Buckles



Cushion Foam Available in the sides, bottom, and back for shock resistance and impact resistance

Sling Bag

Handbag

Utility Pouch



Multiple Carrying Options



2 x MOLLE System Clips Included For attaching to other backpacks



SLB06

Commuting Crossbody Bag

Capacity: 7L / 427 cu in

Dimensions: 35cm x 20cm x 8cm / 13.8" x 7.9" x 3.1"

Weight: 630g / 1.4 lbs



SLB08




Modular Commuting Sling Bag

Capacity: 2L / 122 cu in

Dimensions: 27cm x 4cm x 16cm / 10.6" x 1.6" x 6.3"

Weight: Approx. 125g / 0.3 lbs

NITECORE x LiI Gear



Two-Way YKK Zippers



UTX Durable Buckles




Two Compartments with See-Through Design



Quick-Adjust Shoulder Strap



Crossbody Bag



Sling Bag



Waist Bag



Utility Pouch



Extra Bag

NPP Series



NPP02

Waterproof Crossbody Bag



NPP01 mini

Outdoor Sacoche Bag

NUP Series



NUP30

Multi-Purpose Utility Pouch

MODEL	LED	OUTPUT / RUNTIME					BEAM DISTANCE	PEAK BEAM INTENSITY
		TURBO	HIGH	MID	LOW	ULTRALOW		
NU05 V2	4 x High Performance LEDs	Red Indicator (Slow Flashing)	Red Light (Slow Flashing)	Red Light (Quick Flashing)	White Light (Slow Flashing)	White Light (Constant-on)	-	-
		-	4 Lumens	4 Lumens	40 Lumens	40 Lumens		
		47h	10h	10h	4h	1h45min		
NU06 MI	4 x High Performance LEDs	IR Constant-on	Red Constant-on	Green Constant-on	Blue Constant-on	-	-	-
		-	3 Lumens	8 Lumens	2 Lumens	-		
		4h	9h	9h	5h	-		
		IR Flashing	Red Flashing	Green Flashing	Blue Flashing	Red/Blue Police Warning Flashing		
		-	3 Lumens	8 Lumens	2 Lumens	-		
50h	75h	75h	48h	56h				
NU06 LE	4 x High Performance LEDs	Red Constant-on	Green Constant-on	Blue Constant-on	White Constant-on	-	-	-
		3 Lumens	8 Lumens	2 Lumens	15 Lumens	-		
		9h	9h	5h	5h45min	-		
		Red Flashing	Green Flashing	Blue Flashing	White Flashing	Red/Blue Police Warning Flashing		
		3 Lumens	8 Lumens	2 Lumens	15 Lumens	-		
75h	75h	48h	54h	56h				
NU07 LE	5 x High Performance LEDs	Red Constant-on	Green Constant-on	Yellow Constant-on	White Constant-on	Blue Constant-on	-	-
		3 Lumens	8 Lumens	9 Lumens	15 Lumens	2 Lumens		
		10h	11h	11h	7h	6h		
		Red Flashing	Green Flashing	Yellow Flashing	White Flashing	Blue Flashing		
		3 Lumens	8 Lumens	9 Lumens	15 Lumens	2 Lumens		
50h	50h	50h	40h	40h				
NU11	-	-	White Light		-	-	50m	596cd
		-	150 Lumens	45 Lumens	-	-		
		-	2h30min	6h	-	-		
NU20 Classic	-	Primary White Light				Auxiliary White Light	109m	2963cd
		360 Lumens	200 Lumens	38 Lumens	1 Lumens	20 Lumens		
		2h	5h	7h	97h	7h		
NU21	-	White Light					58m	840cd
		-	360 Lumens	170 Lumens	60 Lumens	6 Lumens		
		-	2h	3h30min	8h	37h		
NU25 MCT/NU25 MCT UL	MCT UHE LEDs	Primary Light (Neutral White Light / Warm Light / Cool White Light)					132m	4351cd
		-	400 Lumens	200 Lumens	60 Lumens	6 Lumens		
		-	2h40min	5h	13h	45h		
NU27	MCT UHE LEDs	600 Lumens	400 Lumens	200 Lumens	70 Lumens	6 Lumens	123m	3705cd
		-	3h	6h30min	13h	57h		
		Primary White Light			Auxiliary White Light			
NU30	-	HIGH	MID	LOW	FLOOD LOW	ULTRALOW	130m	4062cd
		500 Lumens	200 Lumens	100 Lumens	50 Lumens	6 Lumens		
		4h	8h	24h	32h	97h		
NU31	-	550 Lumens	200 Lumens	60 Lumens	50 Lumens	6 Lumens	145m	5800cd
		5h	8h	38h	42h	147h		
NU33	-	700 Lumens	200 Lumens	60 Lumens	50 Lumens	6 Lumens	135m	4578cd
		4h	9h	38h	47h	147h		

NOTE: Runtime has been measured with the first battery type stated in battery options.
* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

WATERPROOF	BATTERY OPTIONS	DIMENSIONS			WEIGHT	MODEL
		LENGTH	HEAD DIAMETER	TAIL DIAMETER		
IP66	Built-in rechargeable Li-ion battery	29.75mm x 29.5mm x 16.42mm (1.17" x 1.16" x 0.65")			11.1g (0.39oz)	NU05 V2
IP66	Built-in rechargeable Li-ion battery	29.5mm x 29.5mm x 25.4mm (1.16" x 1.16" x 1.00")			16.7g (0.59oz)	NU06 MI
IP66	Built-in rechargeable Li-ion battery	29.5mm x 29.5mm x 25.4mm (1.16" x 1.16" x 1.00")			15.8g (0.56oz)	NU06 LE
IP66	Built-in rechargeable Li-ion battery	61.8mm x 28.9mm x 21.7mm (2.43" x 1.14" x 0.85")			24.5g (0.86oz)	NU07 LE
IPX5	Built-in rechargeable Li-ion battery	50.2mm x 59.1mm x 18.7mm (1.98" x 2.33" x 0.74")			41g (1.45oz)	NU11
IP66	Built-in rechargeable Li-ion battery	52.1mm x 33.1mm x 24.4mm (2.05" x 1.30" x 0.96")			38g (1.34 oz)	NU20 Classic
IP66	Built-in rechargeable Li-ion battery	60.1mm x 33.0mm x 25.5mm (2.37" x 1.30" x 1.00")			44g (1.55 oz)	NU21
IP66	Built-in rechargeable Li-ion battery	NU25 MCT: 60mm x 34.4mm x 27.2mm (2.36" x 1.35" x 1.07) NU25 MCT UL: 60mm x 33mm x 25.7mm (2.36" x 1.30" x 1.01)			NU25 MCT: 50g (1.76oz) NU25 MCT UL: 47g (1.66oz)	NU25 MCT/ NU25 MCT UL
IP66	Built-in rechargeable Li-ion battery	65.5mm x 33.9mm x 25.5mm (2.58" x 1.33" x 1.00")			58g (1.98 oz)	NU27
IP66	Built-in rechargeable Li-ion battery	62.3mm x 45.2mm x 31mm (2.45" x 1.78" x 1.22")			90g (3.17 oz)	NU30
IP66	Built-in rechargeable Li-ion battery	62.3mm x 46mm x 35.6mm (2.45" x 1.81" x 1.40")			95.5g (3.37oz)	NU31
IP66	Built-in rechargeable Li-ion battery	62.3mm x 46mm x 35.6mm (2.45" x 1.81" x 1.40")			95.5g (3.37oz)	NU33

MODEL	LED	OUTPUT / RUNTIME					BEAM DISTANCE	PEAK BEAM INTENSITY
		TURBO	HIGH	MID	LOW	ULTRALOW		
NU40	-	1000 Lumens	600 Lumens	300 Lumens	100 Lumens	8 Lumens	100m	2700cd
		-	6h	10h	22h	120h		
NU43	-	1400 Lumens	600 Lumens	300 Lumens	100 Lumens	8 Lumens	130m	3800cd
		-	10h	15h	29h	165h		
NU45	-	Primary White Light					172m	7426cd
		1700 Lumens	1000 Lumens	300 Lumens	100 Lumens	-		
		-	8h	17h	34h	-		
		Auxiliary White Light						
		-	-	-	25 Lumens	8 Lumens		
NU50	-	1400 Lumens	600 Lumens	300 Lumens	100 Lumens	8 Lumens	130m	3800cd
		-	13h	20h	38h	200h		
NU53	-	Primary White Light					175m	6841cd
		1800 Lumens	1300 Lumens	400 Lumens	150 Lumens	-		
		-	9h	18h	37h	-		
		Auxiliary White Light						
		-	-	-	25 Lumens	8 Lumens		
UT27	MCT UHE LEDs	Primary Light (Neutral White Light)	Primary Light (Cool White Light / Neutral White Light / Warm Light)				188m	7124cd
		800 Lumens	500 Lumens	280 Lumens	100 Lumens	-		
		2h30min	3h30min	6h30min	14h30min	-		
		Primary Light (Neutral White Light)	Primary Light (Cool White Light / Neutral White Light / Warm Light)					
		800 Lumens	500 Lumens	280 Lumens	100 Lumens	-		
UT2000	MCT UHE LEDs	2000 Lumens	1000 Lumens	350 Lumens	180 Lumens	20 Lumens	220m	12126cd
		7h	15h	26h	55h	30min		
HA11	UHE LED	-	240 Lumens	-	60 Lumens	6 Lumens	90m	2030cd
		-	4h	-	11h	75h		
		-	240 Lumens	-	60 Lumens	6 Lumens		
		-	7h	-	18h	126h		
HA13	-	-	350 Lumens	-	100 Lumens	6 Lumens	120m	3500cd
		-	3h	-	12h	140h		
		-	350 Lumens	-	100 Lumens	6 Lumens		
HA15 UHE	UHE LED	-	-	200 Lumens	100 Lumens	6 Lumens	80m	1931cd
		-	-	4h	9h	82h		
		-	400 Lumens	200 Lumens	100 Lumens	6 Lumens		
HA23 UHE	MCT UHE LEDs	-	600 Lumens	280 Lumens	100 Lumens	6 Lumens	132m	4364cd
		-	3h	4h30min	12h	125h		
		-	600 Lumens	280 Lumens	100 Lumens	6 Lumens		
-	-	1h30min	2h30min	8h	97h			

NOTE: Runtime has been measured with the first battery type stated in battery options.
 * The runtime for Turbo/High mode is the testing result before starting temperature regulation.

WATERPROOF	BATTERY OPTIONS	DIMENSIONS			WEIGHT	MODEL
		LENGTH	HEAD DIAMETER	TAIL DIAMETER		
IP68	Built-in rechargeable Li-ion battery	79.8mm x 46.1mm x 43.9mm (3.14" x 1.81" x 1.73")			116g (4.09oz)	NU40
IP68	Built-in rechargeable Li-ion battery	79.8mm x 46.1mm x 43.9mm (3.14" x 1.81" x 1.73")			116g (4.09oz)	NU43
IP68	Built-in rechargeable Li-ion battery	79mm x 39.5mm x 49.8mm (3.11" x 1.56" x 1.96")			126g (4.44 oz)	NU45
IP68	Built-in rechargeable Li-ion battery	83.4mm x 48.5mm x 43.9mm (3.28" x 1.91" x 1.73")			146g (5.15oz)	NU50
IP68	Built-in rechargeable Li-ion battery	83.4mm x 48.5mm x 43.9mm (3.28" x 1.91" x 1.73")			151g (5.33 oz)	NU53
IP66	1xHLB1500	56mm x 46.6mm x 32mm (2.20" x 1.83" x 1.26")			74g (2.61oz)	UT27
	3xAAA					
IP68	1xCarbon Battery™ 12K	85mm x 40mm x 25mm (3.35" x 1.57" x 0.98")			122g (4.30 oz)	UT2000
IP66	1xAA	61.5mm x 36.2mm x 28.9mm (2.42" x 1.43" x 1.14")			38g (1.34oz)	HA11
	1xNL1411R					
IPX6	3xAAA	59mm x 50mm x 36mm (2.32" x 1.97" x 1.42")			67g (2.36oz)	HA13
	1xHLB1300					
IP66	1xAA	67.4mm x 28.8mm x 33.4mm (2.65" x 1.13" x 1.31")			43g (1.52 oz)	HA15 UHE
	1xNL1411R					
IP68	1xHLB1500	60.2mm x 46.7mm x 34.2mm (2.37" x 1.84" x 1.35")			56g (1.98 oz)	HA23 UHE
	3xAAA					

MODEL	LED	OUTPUT / RUNTIME					BEAM DISTANCE	PEAK BEAM INTENSITY
		TURBO	HIGH	MID	LOW	ULTRALOW		
HA25 UHE	MCT UHE LEDs	Primary Light (Neutral White Light / Warm Light / Cool White Light)					120m	3611cd
		800 Lumens	450 Lumens	280 Lumens	100 Lumens	6 Lumens		
		2h30min	3h45min	6h	13h	88h		
		Primary Light (Neutral White Light / Warm Light / Cool White Light)						
		-	450 Lumens	280 Lumens	100 Lumens	6 Lumens		
		-	3h30min	4h15min	8h30min	75h30min		
HA27 UHE	MCT UHE LEDs	Primary Light (Neutral White Light / Warm Light / Cool White Light)					150m	5632cd
		800 Lumens	500 Lumens	280 Lumens	100 Lumens	8 Lumens		
		2h	3h30min	7h	15h	65h		
		Primary Light (Neutral White Light / Warm Light / Cool White Light)						
		-	500 Lumens	280 Lumens	100 Lumens	8 Lumens		
		-	2h30min	3h	9h	52h		
HC33	CREE XHP35 HD	1800 Lumens *30min	780 Lumens *1h45min	240 Lumens 5h45min	70 Lumens 16h30min	1 Lumen 330h	187m	8750cd
HC35	4 x CREE XP-G3 S3	2700 Lumens *45min	800 Lumens 3h	270 Lumens 8h15min	40 Lumens 52h	1 Lumen 1200h	134m	4500cd
HC60 UHE	UHE LED	1600 Lumens	1000 Lumens	400 Lumens	100 Lumens	8 Lumens	157m	6170cd
		3h30min	5h	14h	36h	200h		
HC85 UHE / HC85M UHE	UHE LED	Primary White Light					222m	12293cd
		2000 Lumens	1300 Lumens	400 Lumens	100 Lumens	-		
		2h	5h	14h	31h	-		
		Auxiliary White Light						
		-	-	-	40 Lumens	8 Lumens		
		-	-	40h	82h			
HC70 UHE	UHE LED	1600 Lumens	1000 Lumens	500 Lumens	150 Lumens	8 Lumens	156m	6112cd
		5h	8h	18h	38h	220h		
HC75 UHE	UHE LEDs	Mixed Light	Spotlight / Floodlight / Mixed Light			Floodlight	192m	9216cd
		3000 Lumens	1500 Lumens	600 Lumens	200 Lumens	40 Lumens		
		4h30min	7h15min	12h	32h	84h		
HU2000	UHE LED	2000 Lumens	1000 Lumens	400 Lumens	180 Lumens	20 Lumens	160m	6400cd
		9h	11h	17h	31h30min	66h		
		-	1000 Lumens	400 Lumens	180 Lumens	20 Lumens		
		-	6h	10h	20h	42h		
EDC09	2 x MCT UHE LEDs	Neutral White Light	*1450 Lumens	180 Lumens	40 Lumens	1 Lumen	153m	5899cd
			2h15min	2h45min	13h	250h		
		Cool White Light	*1800 Lumens	200 Lumens	50 Lumens	1 Lumen		
			2h15min	2h45min	13h	250h		
		Warm Light	*1050 Lumens	150 Lumens	32 Lumens	1 Lumen		
			2h15min	2h45min	13h	250h		
EDC17	UHI 25 LED	White Light	*1500 Lumens	220 Lumens	50 Lumens	1 Lumen	230m	12400cd
			1h45min	3h30min	16h	260h		
	-	UV Light	LEVEL 3	LEVEL 2	LEVEL 1	-		
			1350mW	650mW	220mW	-		
			2h	5h	13h	-		

NOTE: Runtime has been measured with the first battery type stated in battery options.
* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

WATERPROOF	BATTERY OPTIONS	DIMENSIONS			WEIGHT	MODEL
		LENGTH	HEAD DIAMETER	TAIL DIAMETER		
IP66	1xHLB1500	63mm x 48mm x 33mm (2.48" x 1.89" x 1.30")			65g (2.29 oz)	HA25 UHE
	3xAAA					
IPX6	1xHLB1500	73mm x 43mm x 38mm (2.87" x 1.68" x 1.50")			75g (2.65 oz)	HA27 UHE
	3xAAA					
IP68	1x18650 / 1x1MR18650 / 2xCR123 / 2xRCR123	105.3mm (4.15")	25.5mm x 24.2mm (1.00" x 0.95")	23.8mm (0.94")	51.2g (1.81oz)	HC33
IP68	1x21700 / 1x18650 / 2xCR123 / 2xRCR123	128.2mm (5.05")	28.85mm x 31.77mm (1.14" x 1.25")	28.3mm (1.11")	100g (3.53 oz)	HC35
IP68	1x18650	80mm x 42mm x 48.5mm (3.15" x 1.65" x 1.91")			140g (4.94 oz)	HC60 UHE
IP68	1x18650	HC85 UHE : 89.5mm x 42.2mm x 46mm (3.52" x 1.66" x 1.81")			HC85 UHE : 152g (5.38 oz)	HC85 UHE / HC85M UHE
		HC85M UHE : 90.1mm x 51.5mm x 45.2mm (3.55" x 2.03" x 1.78")			HC85M UHE : 143g (5.04 oz)	
IP68	1x21700	84mm x 45.2mm x 50.5mm (3.31" x 1.78" x 1.99")			172g (6.07 oz)	HC70 UHE
IP68	1x21700	92.4mm x 46.8mm x 45.5mm (3.64" x 1.84" x 1.79")			209g (7.37 oz)	HC75 UHE
IP68	1xNB10000 Gen3	80mm x 41.9mm x 26.1mm (3.15" x 1.65" x 1.03")			114g (4.02 oz)	HU2000
	1xCarbon Battery™ 6K					
IPX6	Built-in rechargeable Li-ion battery	108mm (4.25")	34mm (1.34") (Width)	17mm (0.67") (Height)	114g (4.02 oz)	EDC09
IPX7	Built-in rechargeable Li-ion battery	123mm (4.84")	32mm (1.26") (Width)	16mm (0.63") (Height)	106g (3.74 oz)	EDC17

MODEL	LED	OUTPUT / RUNTIME					BEAM DISTANCE	PEAK BEAM INTENSITY	
		TURBO	HIGH	MID	LOW	ULTRALOW			
EDC Series	EDC23	2500 Lumens	1100 Lumens	200 Lumens	65 Lumens	15 Lumens	280m	20720cd	
		—	1h30min	3h45min	11h	39h			
	EDC27 UHI	3100 Lumens	1100 Lumens	200 Lumens	65 Lumens	15 Lumens	305m	23500cd	
		—	1h35min	4h20min	14h	55h			
	EDC29	2 x UHI 20 MAX LEDs	LUMINSHIELD [®] SEARCH	—	—	—	—	400m	40230cd
			6500/3000 Lumens/Lumens	1200 Lumens	400 Lumens	100 Lumens	15 Lumens		
EDC31	UHI 20 MAX LED	LUMINSHIELD [®] SEARCH	—	—	—	—	380m	35630cd	
		3500/1500 Lumens/Lumens	1100 Lumens	300 Lumens	70 Lumens	5 Lumens			
EDC35	UHI 40 MAX LED	LUMINSHIELD [®] SEARCH	—	—	—	—	550m	75700cd	
		5000/3000 Lumens/Lumens	1300 Lumens	300 Lumens	70 Lumens	5 Lumens			
EDC37	2 x UHI 20 MAX LEDs	LUMINSHIELD [®] SEARCH	—	—	—	—	420m	44010cd	
		8000/3000 Lumens/Lumens	1500 Lumens	400 Lumens	100 Lumens	15 Lumens			
Tiny Monster Series	TM9K Pro	LUMINSHIELD [®] SEARCH	—	—	—	—	510m	65400cd	
		9900/6000 Lumens/Lumens	2000 Lumens	500 Lumens	130 Lumens	30 Lumens			
	TM12K	6 x CREE XHP50	12000 Lumens	1000 Lumens	300 Lumens	100 Lumens	6 Lumens	250m	15600cd
			—	*2h15min	7h30min	20h	200h		
	TM20K	19 x CREE XP-L2 LED	20000 Lumens	3100 Lumens	1900 Lumens	1050 Lumens	320 Lumens	290m	22200cd
			—	*45min	1h45min	4h15min	13h		
TM39	LUMINUS SBT-90 GEN2	5200 Lumens	2000 Lumens	800 Lumens	200 Lumens	—	1500m	562500cd	
		*1h30min	*4h	10h	36h	—			
Precise Series	P10i	Luminus SST-40-W	—	1800 Lumens	280 Lumens	35 Lumens	—	290m	21100cd
		—	2h30min	1h	50h	—			
	P10IX	4 x CREE XP-L2 V6	4000 Lumens	1700/850 Lumens/Lumens	300 Lumens	50 Lumens	2 Lumens	158m	6250cd
			*30min	2h 2h30min	7h15min	38h	350h		
	P20IX	4 x CREE XP-L2 V6	4000 Lumens	1700/850 Lumens/Lumens	300 Lumens	50 Lumens	2 Lumens	221m	12200cd
			*30min	2h 2h30min	7h15min	38h	350h		
P20i UV	Luminus SST-40-W	—	1800 Lumens	250 Lumens	35 Lumens	—	337m	28500cd	
		—	1h45min	8h30min	38h	—			
P20UV V2	CREE XP-L2 V6	—	HIGH (M1/M2/M3)	MID (M3)	LOW (M2)	LOW (M3)	164m	6700cd	
		—	1000 Lumens	330 Lumens	180 Lumens	60 Lumens			
		—	2h30min	7h	16h	46h			
P23i	Luminus SFT-70	3000 Lumens	1500 Lumens	800 Lumens	250 Lumens	50 Lumens	470m	55300cd	
		*30min	2h30min	4h	10h	45h			

NOTE: Runtime has been measured with the first battery type stated in battery options.
*The runtime for Turbo/High mode is the testing result before starting temperature regulation.

WATERPROOF	BATTERY OPTIONS	DIMENSIONS			WEIGHT	MODEL
		LENGTH	HEAD DIAMETER	TAIL DIAMETER		
IP54	Built-in rechargeable Li-Ion battery	102.8mm(4.05")	33mm(1.30") (Width)	22.5mm(0.89") (Height)	101g(3.56 oz)	EDC23
IP54	Built-in rechargeable Li-Ion battery	135.3mm(5.33")	31.4mm(1.24") (Width)	22.2mm(0.87") (Height)	122g(4.30 oz)	EDC27 UHI
IP54	Built-in rechargeable Li-Ion battery	133.5mm(5.26")	34.6mm(1.36") (Width)	22.5mm(0.89") (Height)	160g(5.64 oz)	EDC29
IP68	Built-in rechargeable Li-Ion battery	113.2mm(4.46")	23mm(0.91")	22.6mm(0.89")	100g(3.53 oz)	EDC31
IP68	Built-in rechargeable Li-Ion battery	124.3mm(4.89")	31.8mm(1.25")	26mm(1.02")	178g(6.28 oz)	EDC35
IP54	Built-in rechargeable Li-Ion battery	108mm(4.25")	39.3mm(1.55") (Width)	31mm(1.22") (Height)	199g(7.02 oz)	EDC37
IP68	Built-in rechargeable Li-Ion battery	133mm(5.24")	40mm(1.57")	28mm(1.10")	227g(8.01 oz)	TM9K Pro
IP68	Built-in rechargeable Li-Ion battery	108mm x 41mm x 31mm(4.25" x 1.61" x 1.22")			233g(8.22oz)	TM12K
IP68	Built-in rechargeable Li-Ion battery	145.5mm(5.73")	50mm(1.97")	50mm*26mm (1.97*1.02")	422g(14.89oz)	TM20K
IP68	1xNBP68HD	276mm(10.87")	90mm(3.54")	50mm(1.97")	1361g(48.01oz)	TM39
IP68	1x21700i / 2xCR123 / 2xRCR123	147mm(5.79")	25.4mm(1.00")	28.5mm(1.12")	84g(2.96oz)	P10i
IP68	1x21700i / 2xCR123 / 2xRCR123	137.2mm(5.40")	25.4mm(1.00")	28.5mm(1.12")	79.5g(2.80oz)	P10IX
IP68	1x21700i / 2xCR123 / 2xRCR123	141.5mm(5.57")	31.8mm(1.25")	28.5mm(1.12")	116g(4.09oz)	P20IX
IP68	1x21700i / 2xCR123 / 2xRCR123	150.5mm(5.93")	31.8mm(1.25")	28.5mm(1.12")	124g(4.37oz)	P20i UV
IP68	1x18650 / 2xCR123 / 2xRCR123	151.2mm(5.95")	31.8mm(1.25")	26mm(1.02")	133.5g(4.71oz)	P20UV V2
IP68	1x21700i	143.5mm(5.65")	31.8mm(1.25")	28.5mm(1.12")	114.5g(4.04oz)	P23i

MODEL	LED	OUTPUT / RUNTIME					BEAM DISTANCE	PEAK BEAM INTENSITY
		TURBO	HIGH	MID	LOW	ULTRALOW		
P30i	CREE XHP35 HI	2000 Lumens	1000 Lumens	385 Lumens	85 Lumens	8 Lumens	1000m	250000cd
		*30min	1h30min	4h	18h	100h		
NEW P30	CREE XP-L HI V3	1000 Lumens	400 Lumens	220 Lumens	70 Lumens	1 Lumen	618m	95500cd
P40	5 floodlight LEDs	TURBO	Mixed Light				*2900m	*2130800cd
		*2000 Lumens	600 Lumens	300 Lumens	80 Lumens			
		*1h	2h30min	4h	20h			
		100% Spotlight						
		400 Lumens	200 Lumens	50 Lumens				
		2h30min	3h45min	20h				
		100% Floodlight						
800 Lumens	400 Lumens	100 Lumens						
2h30min	4h	20h						
SRT6i	High Performance LEDs	2100 Lumens	–	300 Lumens	30 Lumens	–	510m	65200cd
		*30min	–	7h30min	70h	–		
MH10 V2	CREE XP-L2 V6	–	1200 Lumens	300 Lumens	55 Lumens	1 Lumen	202m	10200cd
		–	3h45min	8h	48h	1500h		
MH11	CREE XP-L2 V6	1000 Lumens	230 Lumens	50 Lumens	3 Lumens	–	190m	9150cd
		2h15min	4h15min	20h45min	250h	–		
MH12 Pro	UHI 40 LED	3300 Lumens	1200 Lumens	300 Lumens	50 Lumens	1 Lumen	505m	63500cd
		*30min	4h30min	8h30min	50h	650h		
MH25 Pro	UHI 40 LED	3300 Lumens	1200 Lumens	300 Lumens	50 Lumens	1 Lumen	705m	124300cd
		*30min	2h30min	7h30min	50h	650h		
MH40 Pro	UHI 40 MAX LED	3500 Lumens	1300 Lumens	400 Lumens	80 Lumens	–	1300m	423000cd
		*45min	4h15min	13h	82h	–		
		2000 Lumens	1200 Lumens	400 Lumens	80 Lumens	–		
		*1h	4h15min	15h	65h	–		
MT1A Pro	UHI 25 LED	1xNL141R	*800 Lumens	300 Lumens	50 Lumens	–	250m	16700cd
		1h	1h45min	10h	–			
		1xAA	–	200 Lumens	50 Lumens	–		
MT1C Pro	UHI 20 LED	1xNL1816R	1000 Lumens	–	50 Lumens	–	360m	32500cd
		1h15min	–	18h	–			
		800 Lumens	–	50 Lumens	–			
		45min	–	12h	–			
		500 Lumens	–	50 Lumens	–			
1xCR123	1h	–	9h15min	–				
MT2A Pro	UHI 20 LED	1xNL1416R	1000 Lumens	300 Lumens	50 Lumens	–	255m	16500cd
		1h30min	2h45min	20h	–			
		2xAA	–	50 Lumens	60 Lumens	–		
–	–	2h	1h	–				

WATERPROOF	BATTERY OPTIONS	DIMENSIONS			WEIGHT	MODEL
		LENGTH	HEAD DIAMETER	TAIL DIAMETER		
IP68	1x21700 / 2xCR123 / 2xRCR123	177.5mm(6.99")	65mm(2.56")	28.5mm(1.12")	255.5g(9.01oz)	P30i
IP68	1x21700 / 1x18650 / 2xCR123 / 2xRCR123	155.5mm(6.12")	50mm(1.97")	27.2mm(1.07")	158.5g(5.59oz)	NEW P30
IP68	1x21700	186mm(7.32")	67mm(2.64")	37mm(1.46")	390g(13.76 oz)	P40
IP68	1x21700 / 2xCR123 / 2xRCR123	163mm(6.42")	40mm(1.57")	31mm(1.22")	167g(5.89 oz)	SRT6i
IP68	1x21700 / 1x18650 / 2xCR123 / 2xRCR123	147mm(5.79")	25.4mm(1.00")	27.2mm(1.07")	77.5g(2.73oz)	MH10 V2
IP68	1x18650 / 2xCR123 / 2xRCR123	128.3mm(5.05")	24mm(0.94")	24mm(0.94")	60.5g(2.13oz)	MH11
IP68	1x21700	138.5mm(5.45")	26.8mm(1.06")	27mm(1.06")	82g(2.89oz)	MH12 Pro
IP68	1x21700	153.6mm(6.05")	40mm(1.57")	27mm(1.06")	130g(4.59oz)	MH25 Pro
IP68	1xNBP100R	256mm(10.08")	65mm(2.56")	27mm(1.06")	417g(14.71oz)	MH40 Pro
	2x21700					
IP68	1x14500/ 1xAA	93mm(3.66")	19.7mm(0.78")	19.5mm(0.77")	32g(1.13 oz)	MT1A Pro
IP68	1x18350 / 1xRCR123 / 1xCR123	88mm(3.46")	26.8mm(1.06")	24.4mm(0.96")	53g(1.87 oz)	MT1C Pro
IP68	1x14500 / 2xAA	142.8mm(5.62")	19.7mm(0.78")	19.5mm(0.77")	40g(1.41oz)	MT2A Pro

NOTE: Runtime has been measured with the first battery type stated in battery options.
 * The runtime for Turbo/High mode is the testing result before starting temperature regulation.

MODEL	LED	OUTPUT / RUNTIME					BEAM DISTANCE	PEAK BEAM INTENSITY	
		TURBO	HIGH	MID	LOW	ULTRALOW			
Multi-Task Series	MT2C Pro	UHI 20 LED	1xNL1836R	1800 Lumens	–	50 Lumens	–	520m	6700cd
			2h15min	–	28h	–			
		2xRCR123	800 Lumens	–	50 Lumens	–			
	2xCR123	1h30min	–	12h	–				
		800 Lumens	–	50 Lumens	–				
	2h45min	–	20h	–					
MT06MD	Nichia 219B	–	180 Lumens	45 Lumens	4 Lumens	–	58m	860cd	
		–	45min	5h15min	35h	–			
MT10C	CREE XM-L2 U2	920 Lumens	500 Lumens	180 Lumens	70 Lumens	1 Lumen	190m	9000cd	
		30min	45min	1h45min	5h	120h			
MT21C	CREE XP-L HD V6	1000 Lumens	400 Lumens	190 Lumens	50 Lumens	1 Lumen	184m	8500cd	
		*1h	3h45min	7h30min	25h	700h			
		–	–	–	–	–			
NPL Series	NPL25	UHI 20 LED	–	900 Lumens	–	200 Lumens	–	225m	16000cd
			–	35min	–	1h15min	–		
	NPL25 GL	UHI 25 LED	HIGH	LOW	HIGH + GREEN LASER	LOW + GREEN LASER	GREEN LASER	216m	11900cd
			900 Lumens	120 Lumens	900 Lumens + Green Laser < 5mW	120 Lumens + Green Laser < 5mW	< 5mW		
			43min	1h30min	43min	1h30min	10h		
	NPL27	–	–	650 Lumens	–	160 Lumens	–	410m	42000cd
–			50min	–	1h 15min	–			
NPL35	–	–	2000 Lumens	–	320 Lumens	–	412m	42500cd	
		–	1h45min	–	3h15min	–			
T Series	Thumb	2 x High Performance LEDs	–	85 Lumens	30 Lumens	2 Lumens	–	26m	170cd
			–	45min	2h15min	22h	–		
	Thumb LED	2 x High Performance LEDs	45 Lumens	–	–	–	–	24m	150cd
			2h	–	–	–	–		
	T4K	4 x CREE XP-L2 V6	4000 Lumens	200 Lumens	65 Lumens	15 Lumens	1 Lumen	209m	10900cd
			–	2h45min	7h	21h	67h		
	TUBE V2.0	High Performance LED	–	55 Lumens	–	1 Lumen	–	25m	156cd
			–	1h15min	–	58h	–		
	TIKI/TIKI LE/ TIKI GITD/ TIKI GITD	OSRAM P8	–	300 Lumens	60 Lumens	15 Lumens	1 Lumen	71m	1260cd
			–	30min	1h	4h	40h		
TIKI UV	Luminus SST-10-UV	UV		AUX WHITE		–	–	–	
		1000mW	180mW	70 Lumens	35 Lumens				
1h	2h	30min	1h	–	–	–			
TIP3	MCT UHE LEDs	720 Lumens	220 Lumens	65 Lumens	15 Lumens	1 Lumen	92m	2117cd	
		–	1h45min	6h	16h	180h			
TUP2	4 x MCT UHE LEDs	*1200 Lumens	300 Lumens	80 Lumens	15 Lumens	1 Lumen	125m	3900cd	
		–	2h	7h15min	30h	190h			
TIN3	MCT UHE LEDs	*600 Lumens	200 Lumens	65 Lumens	15 Lumens	1 Lumen	90m	2050cd	
		–	1h	2h45min	9h	85h			
Chameleon Series	C7	4 x CREE XP-G3 S3	2500 Lumens	1100 Lumens	320 Lumens	90 Lumens	8 Lumens	279m	19500cd
			*30min	1h45min	4h15min	20h	130h		
		4 x Luminus SST-10-IR	–	7000mW	3000mW	1000mW	–		
–	–	2h	3h15min	9h	–	–	–		

NOTE: Runtime has been measured with the first battery type stated in battery options.
* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

WATERPROOF	BATTERY OPTIONS	DIMENSIONS			WEIGHT	MODEL
		LENGTH	HEAD DIAMETER	TAIL DIAMETER		
IP68	1x18650 / 2xRCR123 / 2xCR123	117.5mm(4.63")	26.8mm(1.06")	24.4mm(0.96")	64g(2.26 oz)	Multi-Task Series MT2C Pro
IPX8	2xAAA	128mm(5.04")	14mm(0.55")	14mm(0.55")	22g(0.78oz)	Multi-Task Series MT06MD
IPX8	1xMR18350 / 1xCR123 / 1xRCR123	91.2mm(3.58")	25.4mm(1.00")	25.4mm(1.00")	57g(2.01oz)	Multi-Task Series MT10C
IPX8	1x18650 / 2xCR123 / 2xRCR123	131mm(5.15")	25.4mm(1.00")	25.4mm(1.00")	103.5g(2.55oz)	Multi-Task Series MT21C
IPX6	1xLi-Ion Battery	56mm x 33mm x 32mm(2.20" x 1.30" x 1.26")			66g(2.33oz)	Multi-Task Series NPL25
IPX6	1xLi-Ion Battery	62mm x 33mm x 32mm(2.44" x 1.30" x 1.26")			74g(2.61oz)	Multi-Task Series NPL25 GL
IPX6	1xLi-Ion Battery	66.5mm x 33mm x 32mm(2.62" x 1.30" x 1.26")			73g(2.57oz)	Multi-Task Series NPL27
IPX6	1xLi-Ion Battery	88.1mm x 37.1mm x 36mm(3.47" x 1.46" x 1.42")			129g(4.55 oz)	Multi-Task Series NPL35
IP65	Built-in rechargeable Li-Ion battery	74mm(2.91") (Length)	24mm(0.94") (Width)	15.8mm(0.62") (Depth)	25g(0.88oz)	T Series Thumb
IP65	Built-in rechargeable Li-Ion battery	74mm(2.91") (Length)	24mm(0.94") (Width)	15.8mm(0.62") (Depth)	25g(0.88oz)	T Series Thumb LED
IP54	Built-in rechargeable Li-Ion battery	82.3mm x 30mm x 29.2mm(3.24" x 1.18" x 1.15")			77g(2.72oz)	T Series T4K
IP65	Built-in rechargeable Li-Ion battery	56.5mm(2.22") (Length)	21mm(0.83") (Width)	8mm(0.31") (Depth)	9.8g(0.34oz)	T Series TUBE V2.0
IP66	Built-in rechargeable Li-Ion battery	55mm(2.17")	14.7mm(0.58")	–	TIKI/TIKI GITD/TIKI GITD BLUE: 12g(0.42oz) TIKI LE: 10.5g(0.37oz)	T Series TIKI GITD/ TIKI GITD
IP66	Built-in rechargeable Li-Ion battery	55mm(2.17")	14.7mm(0.58")	–	10.5g(0.37oz)	T Series TIKI UV
IP54	Built-in rechargeable Li-Ion battery	62mm x 26mm x 15mm(2.44" x 1.02" x 0.59")			30g(1.06oz)	T Series TIP3
IP54	Built-in rechargeable Li-Ion battery	70mm x 27mm x 30mm(2.76" x 1.06" x 1.18")			58g(2.05 oz)	T Series TUP2
IP54	Built-in rechargeable Li-Ion battery	47.2mm x 25.4mm x 14mm(1.86" x 1.00" x 0.55")			20g(0.71 oz)	T Series TIN3
IP68	1x18650 / 2xCR123 / 2xRCR123	148.2mm(5.83")	40mm(1.57")	26mm(1.02")	158g(5.57oz)	Chameleon Series C7

MODEL	LED	OUTPUT / RUNTIME					BEAM DISTANCE	PEAK BEAM INTENSITY		
		TURBO	HIGH	MID	LOW	ULTRALOW				
Explorer Series	EX7	4 x M515S LEDs	Mixed Light/Spotlight/Floodlight					500m	63470cd	
			1500 Lumens	600 Lumens	180 Lumens	30 Lumens	1 Lumen			
			2h30min	5h30min	15h	80h	570h			
			Mixed Light	Spotlight	–	–	–			
			LUMIN SHIELD*	SEARCH	–	–	–			
			*6000 Lumens	*3000 Lumens	–	–	–			
DL Series	DL30	–	1100 Lumens	800 Lumens	650 Lumens	350 Lumens	–	788m	155420cd	
			2h	3h	4h	6h	–			
CL Series	CL10	–	WHITE HIGH	WHITE LOW	RED CONSTANT-ON	BLUE CONSTANT-ON	RED/BLUE WARNING FLASHING	15m	59cd	
			45 Lumens	20 Lumens	5 Lumens	3 Lumens	5 Lumens			
			15h	28h	17h	18h	17h			
Lantern Series	LR40	–	Warm Light		White Light		Warm White Light		–	
			(Max)	(Min)	(Max)	(Min)	(Max)	(Min)		
			80 Lumens	15 Lumens	50 Lumens	15 Lumens	100 Lumens	10 Lumens		
				15h	45h	10h	38h	8h	65h	
	LR70	2 x Luminus SST40	Flashlight Mode					300m	23100cd	
			3000 Lumens	1000 Lumens	300 Lumens	35 Lumens	1 Lumen			
–			10h	2h	100h	600h				
Lantern Mode										
		20 x high CRI LEDs	–	400 Lumens	55 Lumens	5 Lumens	–			
			–	7h	60h	200h	–			
NWL Series	NWL20	–	Spotlight				93m	1269cd		
			–	290 Lumens	–	125 Lumens			–	
			–	10h	–	15h			–	
				Floodlight						
				–	600 Lumens	280 Lumens	30 Lumens			–
				–	6h	10h	78h			–
NWL30	–	White Light					120m	3577cd		
		HIGHEST	LOWEST	–	–	–				
		3000 Lumens	50 Lumens	–	–	–				
		7h30min	130h	–	–	–				
GEM Series	GEM8	DREE XP-L HI V3	500 Lumens	–	–	–	1 Lumen	39m	380cd	
			*1h	–	–	–	500h			
	GEM10UV	Ultraviolet 3000mW, 365nm	Ultraviolet (Turbo)	–	–	–	Ultraviolet (Ultralow)	–	–	
			3000mW	–	–	–	5mW			
			*4h15min	–	–	–	500h			

WATERPROOF	BATTERY OPTIONS	DIMENSIONS			WEIGHT	MODEL
		LENGTH	HEAD DIAMETER	TAIL DIAMETER		
IP68	1x21700	130mm (5.12")	35mm (1.38")	28mm (1.10")	140g (4.94 oz)	Explorer Series
IP68	1x21700	164.6mm (6.48")	47.7mm (1.88")	28.8mm (1.13")	273g (9.63 oz) (In Air) 126g (4.44 oz) (Underwater)	DL Series
IPX4	2xAAA	56.5mm x 22.4mm x 45.0mm (2.22" x 0.88" x 1.77")			28g (0.99 oz)	CL Series
–	Built-in rechargeable Li-ion battery	117mm x 96mm x 96mm (4.61" x 3.78" x 3.78")			222g (7.83oz)	Lantern Series
IP67	Built-in rechargeable Li-ion battery	113mm x 60mm x 34mm (4.45" x 2.36" x 1.34")			271g (9.56 oz)	Lantern Series
IPX5	1x21700	216.7mm x 50mm x 41.2mm (8.53" x 1.97" x 1.62")			153g (5.40oz)	NWL Series
IP66	Built-in rechargeable Li-ion battery	106.4mm x 121.8mm x 52.7mm (4.19" x 4.80" x 2.07")			515g (18.17oz)	NWL Series
IPX8	1x18650 / 2xCR123 / 2xRCR123	139mm (5.47")	9mm (0.35")	21.5mm (0.85")	57.7g (2.04oz)	GEM Series
IPX8	1x18650 / 2xCR123 / 2xRCR123	135mm (5.31")	16mm (0.63")	21.5mm (0.85")	66.5g (2.35oz)	GEM Series

NOTE: Runtime has been measured with the first battery type stated in battery options.
* The runtime for Turbo/High mode is the testing result before starting temperature regulation.

All images, text and statements specified herein this catalogue are for reference purpose only. Should any discrepancy occur between this catalogue and information specified on www.nitecore.com, information on our official website shall prevail. Sysmax innovations Co., Ltd. reserves the rights to interpret and amend the content of this document at any time without prior notice.

PHOTO CREDITS

- | | | | |
|-----------------------------------|------------------------|----------------|-----------------|
| stanislavpetera & hard_task_photo | Weerapat Kiatdumrong | 郑凯 | its_sa_nam |
| Lee McGrath | fotografianocturna.net | __call.me.v__ | 菜园 |
| trailrunningnews | lock | 汗斯 | victorlaforteza |
| Victor Rodriguez | Eftihis Samolis | ookorkut | angel.ehb |
| Philipp Stutschies | gudao-wang | roldangilbuena | David Pacheco |
| Vrg fotografia | Jakub Kasprzak | 数糖小姐姐 | |